

Pablo

TECHNICAL DATA / 数据

MOUNTING / 安装

Mounting location / 安装位置: Track Mounted/轨道安装
Type / 类型: Track Mounted/轨道式

ELECTRICAL / 电器参数

Voltage / 电压: 220-240V
Frequency / 频率: 50/60Hz
Dimming / 调光: Depending on driver/取决于驱动

DIMENSION / 相关尺寸

Dimension / 尺寸: Ø58*110 mm
Height / 高度: max195 mm
Cut out / 开孔: NO

LIGHT / 灯具

Adjustability / 可调角: 355° Rotation|90° Tilting/355° 旋转|90° 倾斜
Light distribution / 照明方式: Direct/直接
Track / 轨道: 1Circuits/3 Circuits/1 Circuits DALI/3 Circuits DALI

LAMP DESCRIPTION / 光源参数

Lamp type / 光源类型: COB
Colour rendering index (CRI) / 显色指数: Ra>90
MacAdam / 色容差: <3

NOMINAL FLUX / 光通量

2700K:10W980lm;12W1176lm;15W1470lm
3000K:10W1050lm;12W1260lm;15W1575lm
3500K:10W1070lm;12W1284lm;15W1605lm
4000K:10W1100lm;12W1320lm;15W1650lm

OTHERS / 其他

LED life Time / 光源寿命: > 50,000h - L80 - B10 (Ta 25°C)
Environment temperature / 温度环境: -20°C-40°C
Ingress protection / 防护等级: IP20

PRODUCT DESCRIPTION / 产品描述

The track spotlight adopts high-quality accessories and professional optical technology, with good color rendering and high brightness. The adjustable angle range is wide, which can be easily matched with the ideal lighting effect. 轨道射灯采用高品质的配件与专业的光学技术，显色好，亮度高。可调角度范围广，可轻松搭配出理想的灯光效果。

PROJECT / 项目

TYPE / 类型

NOTES / 笔记


QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸

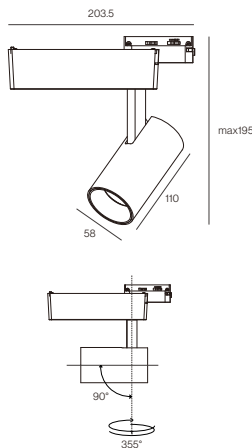

PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱: 20PCS/CTN
NW / 净重: 9.97KG/CTN
GW / 毛重: 11.97KG/CTN
Inner box size / 内盒尺寸: 18.5×17.7×6.2 CM
Outer box size / 外箱尺寸: 39×37×33 CM




ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam Angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注
02 轨道式	096A01000	10 10W	*	27 2700	G 90	15 15°	SW 砂白	0 Non-DIM	*	W 砂白	-xx
		12 12W		30 3000	H 97	25 25°	SB 砂黑	1 TRIAC		B 砂黑	
		15 15W		35 3500		38 38°		2 0/1-10V			
				40 4000		50 50°		3 DALI			

Example/例如: 02.096A0100010*27G15SW0*W(-XX)

LIGHT DISTRIBUTION / 配光曲线


3000K/10W



Beam Angle:15°

	h(m)	E(lx)	D(m)
1	8993	0.26	
2	2248	0.52	
3	999	0.78	
4	562	1.03	
5	359	1.30	


Luminous flux luminaire
796lm (EXTREME CUT OFF)



Beam Angle:25°

	h(m)	E(lx)	D(m)
1	4232	0.46	
2	1058	0.92	
3	470	1.38	
4	265	1.85	
5	169	2.31	


Luminous flux luminaire
885lm (EXTREME CUT OFF)



Beam Angle:38°

	h(m)	E(lx)	D(m)
1	2135	0.69	
2	534	1.38	
3	237	2.07	
4	133	2.76	
5	85	3.45	

Luminous flux luminaire
850lm (EXTREME CUT OFF)




Beam Angle:50°

	h(m)	E(lx)	D(m)
1	1151	0.95	
2	288	1.90	
3	128	2.84	
4	72	3.79	
5	46	4.74	

Luminous flux luminaire
807lm (EXTREME CUT OFF)


3000K/15W



Beam Angle:15°

	h(m)	E(lx)	D(m)
1	11526	0.26	
2	2882	0.52	
3	1281	0.77	
4	720	1.03	
5	461	1.29	


Luminous flux luminaire
1013lm (EXTREME CUT OFF)



Beam Angle:25°

	h(m)	E(lx)	D(m)
1	5196	0.46	
2	1299	0.92	
3	577	1.39	
4	325	1.85	
5	208	2.31	


Luminous flux luminaire
1092lm (EXTREME CUT OFF)



Beam Angle:38°

	h(m)	E(lx)	D(m)
1	2712	0.69	
2	678	1.38	
3	301	2.07	
4	170	2.76	
5	109	3.45	

Luminous flux luminaire
1080lm (EXTREME CUT OFF)



Beam Angle:50°

	h(m)	E(lx)	D(m)
1	1474	0.95	
2	369	1.90	
3	164	2.85	
4	92	3.80	
5	59	4.75	

Luminous flux luminaire
1032lm (EXTREME CUT OFF)

ACCESSORIES / 配件

Oval Flood Lens / 拉伸镜片
60×0.3



Oval Flood Lens / 拉伸镜片
60×15



Flood Lens / 泛光镜片
18°/19°



Flood Lens / 泛光镜片
27°/32°



Oval Flood Lens / 拉伸镜片
60×10




Oval Flood Lens / 拉伸镜片
40×10



Flood Lens / 泛光镜片
22°/23°




Flood Lens / 泛光镜片
33°/45°



Honeycomb / 蜂窝网



APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE 两线轨道



220V~250V 16A Max.



SIZE(mm)

1000

2000

3000

PRODUCT NAME

Track / 轨道

Track / 轨道


Track / 轨道

ORDER CODE

TL-0210

TL-0220


TL-0230



109x35x19

Power feeder unit/电源输入端


TL-0235



78x34x19

Linear(connector)/电源接驳器


TL-0231



70x70x17

L-connector/L型电源接驳器


TL-0232



105x70x17

T-connector/T型电源接驳器


TL-0233



105x105x17

X-connector/X型电源接驳器


TL-0234



280x35x19

Linear flexible/电源接驳器

TL-0236




31x34x19

End caps/堵头 (套)

TL-0237

APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE
三线轨道




单相电 230V 16A Max. & 120V 20A Max.



SIZE(mm)
1000
2000
3000

PRODUCT NAME
Track / 轨道
Track / 轨道
Track / 轨道


ORDER CODE
TL-0310
TL-0320
TL-0330



108.5x35x18

Power feeder unit/电源输入端


TL-0335



80x35x18

Linear(connector)/电源接驳器


TL-0331



182x35x18

Linear(connector)/电源接驳器


TL-0331L



108.5x108.5x18

L-connector/L型电源接驳器


TL-0332



182x108.5x18

T-connector/T型电源接驳器


TL-0333



182x182x18

X-connector/X型电源接驳器

TL-0334



260x35x18

Linear flexible/电源接驳器

TL-0336




16.5x35x18

End caps/堵头 (套)

TL-0337

APPLY TO / 适用于




3 CIRCUITS/1 CIRCUITS DALI
TRACK SURFACE
四线三回路/四线DALI轨道




220V


单相电 230V 16A Max.



三相电 230V 3*16A Max.



单相电 230V 16A Max.+DALI信号接线



SIZE(mm)

1000

2000

3000

PRODUCT NAME

Track / 轨道

Track / 轨道


Track / 轨道

ORDER CODE

PRO-0410

PRO-0420


PRO-0430



98x35x35

Power feeder unit/电源信号输入端


PRO-0431L/R



166x35x35

Linear(connector)/电源信号接驳器


PRO-0434



100x100x35

L-connector/L型电源信号接驳器


PRO-0435L/R



166x100x35

T-connector/T型电源信号接驳器


PRO-0436L1/R1/L2/R2



166x166x35

X-connector/X型电源信号接驳器


PRO-0437



68x21x35

Conductive connector/导电接驳器


PRO-0433



68x31x35

Insulated connector/绝缘接驳器


PRO-0433A



248x35x35

Linear flexible/电源信号接驳器

PRO-0439




35x35.5x31

End caps/堵头

PRO-0432


APPLY TO / 适用于




3 CIRCUITS DALI TRACK SURFACE 六线三回路轨道



单相电 230V 16A Max.



三相电 230V 3*16A Max.



SIZE(mm)

1000

2000

3000

PRODUCT NAME

Track / 轨道

Track / 轨道


Track / 轨道

ORDER CODE

PRO-0610

PRO-0620

PRO-0630



139x35x35

Power feeder unit/电源信号输入端


PRO-0631L/R



107x21x35

Linear(connector)/电源信号接驳器


PRO-0633



203x35x35

Linear(connector)/电源信号接驳器


PRO-0634



119x119x35

L-connector/L型电源信号接驳器


PRO-0635L/R



203x119x35

T-connector/T型电源信号接驳器


PRO-0636L1/R1/L2/R2



203x203x35

X-connector/X型电源信号接驳器


PRO-0637



285x35x35

Linear flexible/电源信号接驳器

PRO-0639



264x35x35

Linear flexible/电源信号接驳器

PRO-0635



35x35.5x31

End caps/堵头

PRO-0432