

Pablo S

TECHNICAL DATA

MOUNTING

Mounting location	Magnetic
Type	Magnetic

ELECTRICAL

Voltage	48V
Frequency	--
Dimming	Depending on driver

DIMENSION

Dimension	Ø45*148 mm
Height	201mm
Cut out	NO
Min. recessed depth	NO

LIGHT

Adjustability	365° Rotation 90° Tilting
Light distribution	Direct
Unified glare rating(UGR)	NO

LAMP DESCRIPTION

Lamp type	COB
Colour rendering index (CRI)	Ra>90
MacAdam	<3

NOMINAL FLUX

2700K:10W1176lm
3000K:10W1260lm
3500K:10W1284lm
4000K:10W1320lm

OTHERS

LED life Time	> 50,000h - L80 - B10 (Ta 25°C)
Environment temperature	-20°C-40°C
Ingress protection	IP20

PRODUCT DESCRIPTION

Magnetic lighting system as a new generation of lighting solutions, through the track layout consistent with the decoration style, lamps in the form of modules, convenient disassembly, flexible movement and other features of free combination. It not only attention to both the key lighting and basic lighting functions. Thoroughly change before need to cut hole, wiring and other troublesome installation way, totally accord with the trend of current minimalism style popularity.

PROJECT

TYPE

NOTES


QUANTITY

DATE

PHOTO



DIMENSIONS

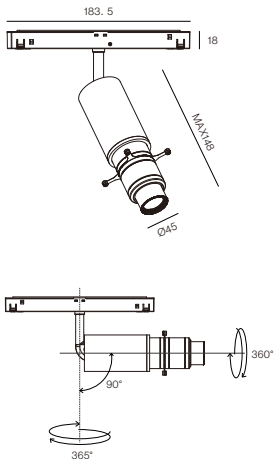

PACKAGE CONTENT

QTN/CTN	20PCS/CTN
NW	6KG/CTN
GW	8KG/CTN
Inner box size	25.2×19.5×7.5CM
Outer box size	52×40×40CM




DATA

Type	Model No.	Code No.	Power	CCT	CRI	Beam Angle	Body Color	Dimming	Reflector Color	Remark
Magnetic	PS2010	07.002X01000	10W	2700K 3000K 3500K 4000K	90	Wide flood 52°	Black	Non-DIM 0/1-10V DALI TRIAC	Black	-xx

LIGHT DISTRIBUTION

3000/10W



Luminous flux luminaire
387lm (EXTREME CUT OFF)

Beam Angle:52°

	h(m)	E(lx)	D(m)
1	631	0.97	
2	158	1.93	
3	70	2.90	
4	39	3.86	
5	25	4.83	

Light spot shape choice / 光点形状选择



ROUND



SQUARE



TRIANGLE



RECTANGLE



TRAPEZOID




SECTOR



RHOMBUS

Shooting distance / 投射距离(m):

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

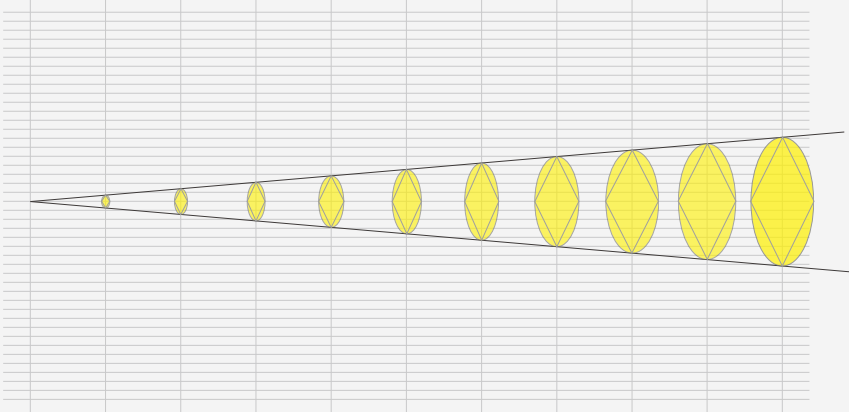


Diameter round spot / 圆形光斑直径(m):

0 0.50 1.00 1.50 2.00 2.50 3.00 3.50 4.00 4.50 5.00

Diameter square spot / 边长(m):

0 0.35 0.70 1.06 1.41 1.77 2.12 2.48 2.83 3.19 3.54

APPLY TO



MINI TRACK M26A Suspended/surface
order installation track, light insets, mounting accessories separately




CASAMBI



inset single control via
Casambi app


Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

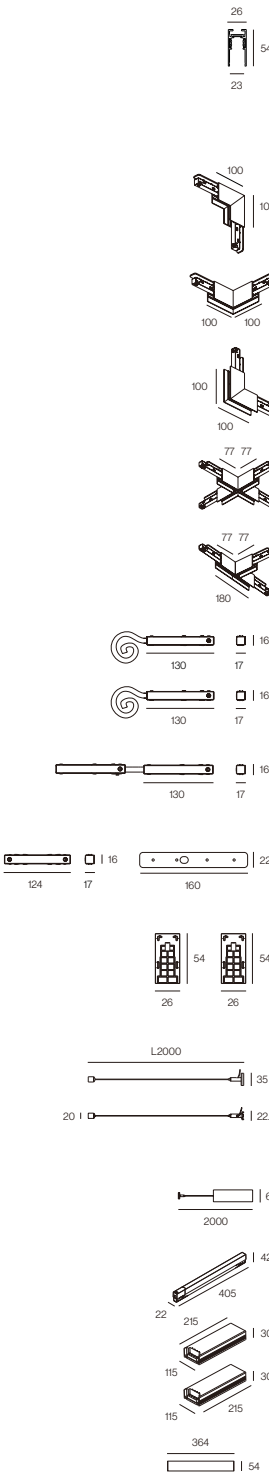

Model No.	Size(mm)	Product Name	Code No.
M26A10	1000	Track	07.M26A10000
M26A20	2000	Track	07.M26A20000
M26A30	3000	Track	07.M26A30000
M26AV0	100x100	Channel Corner*V90°	07.M26AV9000
M26AH0	100x100	Channel Corner*H90°	07.M26AH9000
M26AE0	100x100	Channel Corner*E90°	07.M26AE9000
M26AX0	77x77	X-Shaped Corner*X90°	07.M26AX9000
M26AT0	180x77x77	T-Shaped Corner*T90°	07.M26AT9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L05	54x26	End Caps	07.M26L05000
M26L07	2000x35x22.5	Pendant Kit	07.M26L06000
M26L08	2000x65	Pendant Kit	07.M26L07000
M26L09	405x22x42 215x115x30 215x115x30	Insert Power Supply Power Supply /LRS/350W/48V Power Supply /UHP/200W/48V	07.M26L10000 2.01.MW022 2.01.MW023
M26L10	364x54	Driver Box	07.M26L08000

APPLY TO



MINI TRACK M26T Trimless

order installation track, light insets, mounting accessories separately

CASAMBI




inset single control via
Casambi app



Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee



Model No.

Size(mm)

Product Name

Code No.

M26T10

1000

Track

07.M26T10000

M26T20

2000

Track

07.M26T20000

M2630

3000

Track

07.M26T30000



M26TV0

100x100

Channel Corner*V90°

07.M26TV9000



M26TH0

100x100

Channel Corner*H90°

07.M26TH9000



M26TE0

100x100

Channel Corner*E90°

07.M26TE9000



M26TX0

77x77

X- Shaped Corner*X90°

07.M26TX9000




M26TT0

180x77x77

T- Shaped Corner*T90°

07.M26TT9000




M26L01

130x17x16 Cable L:500

Power Feeder Unit

07.M26L01000




M26L02

130x17x16 Cable L:2000

Power Feeder Unit

07.M26L02000



M26L03

130x17x16

Linear Flexible

07.M26L03000




M26L04

124x17x16/160x22

Linear Connector

07.M26L04000




M26L05

54x26

End Caps

07.M26L05000



M26L09

405x22x42

Insert Power Supply

07.M26L10000

215x115x30

Power Supply /LRS/350W/48V


2.01.MW022

215x115x30

Power Supply /UHP/200W/48V

2.01.MW023

APPLY TO



MINI TRACK M26R Trim

order installation track, light insets, mounting accessories separately




CASAMBI



inset single control via
Casambi app

Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee



Model No.	Size(mm)	Product Name	Code No.
M26R10	1000	Track	07.M26R10000
M26R20	2000	Track	07.M26R20000
M26R30	3000	Track	07.M26R30000



M26RV0	100x100	Channel Corner*V90°	07.M26RV9000
--------	---------	---------------------	--------------



M26RH0	100x100	Channel Corner*H90°	07.M26RH9000
--------	---------	---------------------	--------------




M26RE0	100x100	Channel Corner*E90°	07.M26RE9000
--------	---------	---------------------	--------------




M26RX0	77x77	X- Shaped Corner*X90°	07.M26RX9000
--------	-------	-----------------------	--------------




M26RT0	180x77x77	T-Shaped Corner*T90°	07.M26RT9000
--------	-----------	----------------------	--------------



M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
--------	-----------------------	-------------------	--------------




M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
--------	------------------------	-------------------	--------------




M26L03	130x17x16	Linear Flexible	07.M26L03000
--------	-----------	-----------------	--------------



M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
--------	------------------	------------------	--------------



M26L06	54x26	End Caps	07.M26L05R00
--------	-------	----------	--------------



M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

APPLY TO



MINI TRACK M26E Trimless
order installation track, light insets, mounting accessories separately








CASAMBI



inset single control via
Casambi app


Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee



Model No.	Size(mm)	Product Name	Code No.
M26E10	1000	Track	07.M26E10000
M26E20	2000	Track	07.M26E20000
M26E30	3000	Track	07.M26E30000
M26EV0	100x100	Channel Corner*V90°	07.M26EV9000
M26EH0	100x100	Channel Corner*H90°	07.M26EH9000
M26EE0	100x100	Channel Corner*E90°	07.M26EE9000
M26EX0	77x77	X- Shaped Corner*X90°	07.M26EX9000
M26ET0	180x77x77	T-Shaped Corner*T90°	07.M26ET9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L05	54x26	End Caps	07.M26L05000
M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

APPLY TO



MINI TRACK M26S Surface

order installation track, light insets, mounting accessories separately









CASAMBI



inset single control via
Casambi app

Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

	Model No.	Size(mm)	Product Name	Code No.
	M26S10	1000	Track	07.M26S10000
	M26S20	2000	Track	07.M26S20000
	M26S30	3000	Track	07.M26S30000
	M26SV0	50x50	Channel Corner*V90°	07.M26SV9000
	M26SH0	50x50	Channel Corner*H90°	07.M26SH9000
	M26SE0	50x50	Channel Corner*E90°	07.M26SE9000
	M26SX0	110x110	X- Shaped Corner*X90°	07.M26SX9000
	M26ST0	110x68x215	T-Shaped Corner*T90°	07.M26ST9000
	M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
	M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
	M26L03	130x17x16	Linear Flexible	07.M26L03000
	M26L14	124x17x16/160x22	Linear Connector	07.M26L04S00
	M26L11	26.4x215	End Caps	07.M26L05S00
	M26L09	405x22x42	Insert Power Supply	07.M26L10000