

THEA

TECHNICAL DATA / 数据

MOUNTING / 安装

Mounting location / 安装位置: Ceiling / 天花安装
Type / 类型: Recessed / 嵌入式

ELECTRICAL / 电器参数

Voltage / 电压: 220V
Frequency / 频率: 50/60Hz
Dimming / 调光: Depending on driver / 取决于驱动

DIMENSION / 相关尺寸

Dimension / 尺寸: Ø83 mm
Height / 高度: 72 mm
Cut out / 开孔: Ø75 mm
Min. recessed depth / 最小天花高度: 92 mm

LIGHT / 灯具

Adjustability / 可调角: 24° Tilting | 24° 倾斜
Light distribution / 照明方式: Direct / 直接
Unified glare rating (UGR) / 防眩指数: <19

LAMP DESCRIPTION / 光源参数

Lamp type / 光源类型: COB
Colour rendering index (CRI) / 显色指数: Ra>90
MacAdam / 色容差: <3

NOMINAL FLUX / 光通量

2700K: 8W 784lm / 10W 980lm
3000K: 8W 840lm / 10W 1050lm
3500K: 8W 856lm / 10W 1070lm
4000K: 8W 880lm / 10W 1100lm

OTHERS / 其他

LED life Time / 光源寿命: > 50,000h - L80 - B10 (Ta 25°C)
Environment temperature / 温度环境: -20°C - 40°C
Ingress protection / 防护等级: IP20

PRODUCT DESCRIPTION / 产品描述

It is characterized by a unique internal geometry allowing it to completely eliminate visual glare and providing beautiful diffuse lighting at the same time.

它的特点是独特的内部几何形状，使其能够完全消除视觉眩光，同时提供美丽的漫射照明。

PROJECT / 项目

TYPE / 类型

NOTES / 笔记



QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸



PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱: 50PCS/CTN
NW / 净重: 12.5KG/CTN
GW / 毛重: 14.5KG/CTN
Inner box size / 内盒尺寸: 11×11×9.5 CM
Outer box size / 外箱尺寸: 57×23×49 CM




ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注	
01 嵌入式	223A01000	8 8W	*	27 2700	G 90	18 18°	SW 砂白	0 Non-DIM	*	D 哑黑	-xx	
		10 10W		30 3000	H 97	24 24°		1 TRIAC				
		12 12W		35 3500		36 36°		2 0/1-10V				
				40 4000		50 50°		3 DALI				
								5 BLE				
							6 ZIGBEE					

Example/例如: 01.223A01000-8*27G18SW0*D(-XX)

LIGHT DISTRIBUTION / 配光曲线

3000K / 8W

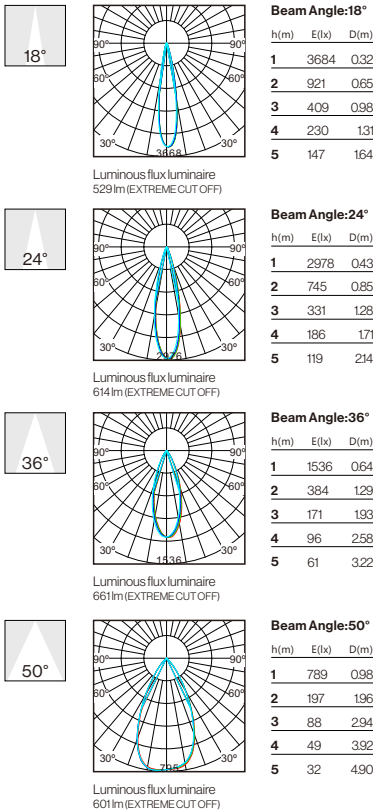

3000K / 12W

