

## Goldfish

### TECHNICAL DATA / 数据

#### MOUNTING / 安装

Mounting location / 安装位置:

Ceiling / 天花安装

Type / 类型:

Recessed / 嵌入式

#### ELECTRICAL / 电器参数

Voltage / 电压:

220V

Frequency / 频率:

50/60Hz

Dimming / 调光:

Depending on driver / 取决于驱动

#### DIMENSION / 相关尺寸

Dimension / 尺寸:

Ø72 mm

Height / 高度:

80 mm

Cut out / 开孔:

Ø65 mm

Min. recessed depth / 最小天花高度:

100 mm

#### LIGHT / 灯具

Adjustability / 可调角:

NO

Light distribution / 照明方式:

Direct / 直接

Unified glare rating (UGR) / 防眩指数:

<10

#### LAMP DESCRIPTION / 光源参数

Lamp type / 光源类型:

COB

Colour rendering index (CRI) / 显色指数:

Ra>90

MacAdam / 色容差:

<3

#### NOMINAL FLUX / 光通量

2700K:8W 784lm / 10W 980lm

3000K:8W 840lm / 10W 1050lm

3500K:8W 856lm / 10W 1070lm

4000K:8W 880lm / 10W 1100lm

#### OTHERS / 其他

LED life Time / 光源寿命:

> 50,000h - L80 - B10 (Ta 25°C)

Environment temperature / 温度环境:

-20°C-40°C

Ingress protection / 防护等级:

IP20

### PRODUCT DESCRIPTION / 产品描述

The unique narrow side face ring design breaks through the traditional way of expression. rich color matching, to meet the various theme space applications. 30° shading angle design, ugr<10, to provide you with more comfortable lighting space. various dimming control schemes are available with dimming accuracy up to 0.1%.

独特的窄边面环设计突破了传统的表达方式。丰富的色彩搭配，满足各种主题空间的应用。30°遮光角度设计，ugr<10，为您提供更舒适的照明空间。各种调光控制方案，调光精度可达0.1%。

### ORDER TEMPLATE / 订单模板

| Type<br>类别 | Series<br>系列 | Power<br>功率 | Code<br>识别码 | CCT<br>色温 | CRI<br>显指 | Beam Angle<br>光束角 | Body Color<br>颜色 | Dimming<br>调光 | Code<br>识别码 | Reflector Color<br>防眩杯颜色 | Remark<br>备注 |
|------------|--------------|-------------|-------------|-----------|-----------|-------------------|------------------|---------------|-------------|--------------------------|--------------|
| 01 嵌入式     | 176B01000    | 08 8W       | *           | 27 2700   | G 90      | 19 19°            | MW 哑白            | 0 Non-DIM     | *           | A 白                      | -xx          |
|            |              | 10 10W      |             | 30 3000   | H 97      | 26 26°            | MB 哑黑            | 1 TRIAC       |             | D 黑                      |              |
|            |              |             |             | 35 3500   |           | 37 37°            |                  | 2 0/1-10V     |             | S 银                      |              |
|            |              |             |             | 40 4000   |           | 55 55°            |                  | 3 DALI        |             | R 红                      |              |
|            |              |             |             |           |           |                   |                  | 5 BLE         |             | G 金                      |              |
|            |              |             |             |           |           |                   |                  | 6 ZIGBEE      |             | M 玫瑰金                    |              |

Example/例如: 01176B01000-08\*27G19MW0\*A(-XX)

### PROJECT / 项目

### TYPE / 类型

### NOTES / 笔记


### QUANTITY / 数量

### DATE / 日期

### PHOTO / 图片



### DIMENSIONS / 尺寸




### PACKAGE CONTENT / 包装

|                        |              |
|------------------------|--------------|
| QTN/CTN / 数量/箱:        | 50PCS/CTN    |
| NW / 净重:               | 15KG/CTN     |
| GW / 毛重:               | 17KG/CTN     |
| Inner box size / 内盒尺寸: | 11×11×9.5 CM |
| Outer box size / 外箱尺寸: | 57×23×49 CM  |



## LIGHT DISTRIBUTION / 配光曲线

### 3000K/8W

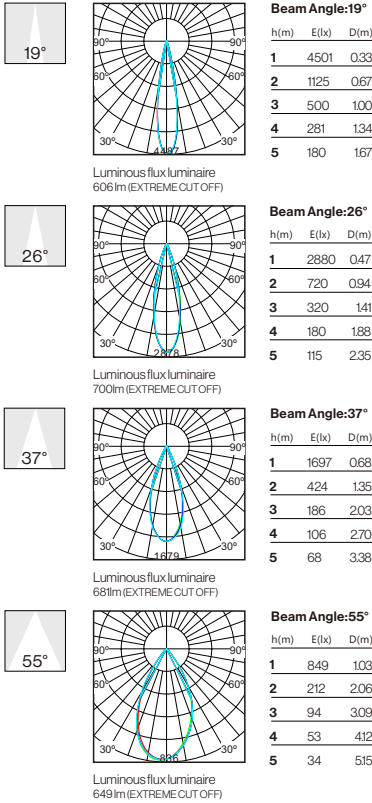

### 3000K/10W

