

Grab

TECHNICAL DATA / 数据

MOUNTING / 安装
Mounting location / 安装位置: Track Mounted/轨道安装
Type / 类型: Track Mounted /轨道式

ELECTRICAL / 电器参数
Voltage / 电压: 220-240V
Frequency / 频率: 50/60Hz
Dimming / 调光: Depending on driver/取决于驱动

DIMENSION / 相关尺寸
Dimension / 尺寸: Ø70*170 mm
Height / 高度: 281mm
Cut out / 开孔: NO

LIGHT / 灯具
Adjustability / 可调角: 355° Rotation|90° Tilting/355°旋转|90° 倾斜
Light distribution / 照明方式: Direct 直接
Track/轨道: 1Circuits/3 Circuits/1 Circuits DALI

LAMP DESCRIPTION / 光源参数
Lamp type / 光源类型: COB
Colour rendering index (CRI) / 显色指数: Ra>90
MacAdam / 色容差: <3

NOMINAL FLUX / 光通量
2700K:25W 3200lm;30W 3840lm
3000K:25W 3350lm;30W 4020lm
3500K:25W 3475lm;30W 4170lm
4000K:25W 3550lm;30W 4260lm

OTHERS / 其他
LED life Time / 光源寿命: > 50,000h - L80 - B10 (Ta 25°C)
Environment temperature / 温度环境: -20°C-40°C
Ingress protection / 防护等级: IP20

PRODUCT DESCRIPTION / 产品描述

High color rendering track-type COB spotlight, large-angle adjustable, flexible and free beam, equipped with DALI dimming technology to realize intelligent space lighting.

高显色轨道式COB射灯，大角度随心调节，光束灵动且自由，搭载DALI调光技术，实现智能空间照明，

PROJECT / 项目

TYPE / 类型

NOTES / 笔记


QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸

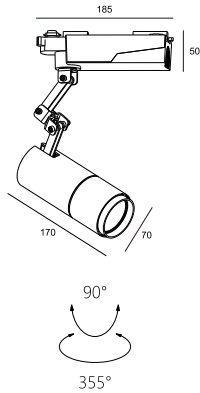

PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱: 6PCS/CTN
NW / 净重: 4.6KG/CTN
GW / 毛重: 6.6KG/CTN
Inner box size / 内盒尺寸: 30*24.5*13 CM
Outer box size / 外箱尺寸: 50*32*42 CM




ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam Angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注
02 轨道式	02J14B03000	25 25W 30 30W	*	27 2700	G 90	15 15°	SW 砂白	0 Non-DIM	*	A 砂白	-xx
				30 3000	H 97	36 36°	SB 砂黑	1 TRIAC		D 砂黑	
				35 3500		60 60°		2 0/1-10V			
				40 4000				3 DALI			


Example/例如：02:114B03000-25*27G15SW0*A(-XX)

LIGHT DISTRIBUTION / 配光曲线

2700K /25W

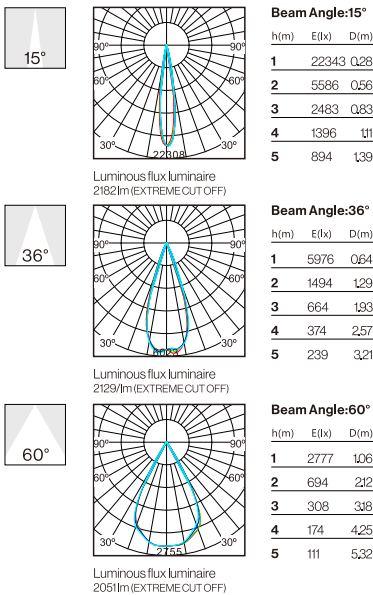


2700K /30W

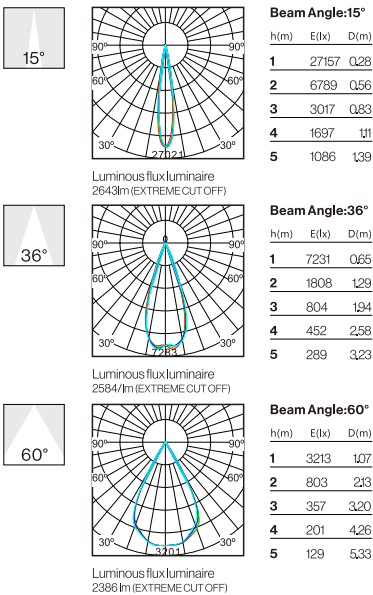

ACCESSORIES / 配件

Oval Flood Lens / 拉伸镜片
60×0.3



Oval Flood Lens / 拉伸镜片
60×15



Flood Lens / 泛光镜片
18°/19°



Flood Lens / 泛光镜片
27°/32°




Honeycomb / 蜂窝网



Oval Flood Lens / 拉伸镜片
60×10




Oval Flood Lens / 拉伸镜片
40×10




Flood Lens / 泛光镜片
22°/23°



Flood Lens / 泛光镜片
33°/45°



APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE
两线轨道




220V~250V 16A Max.



SIZE(mm)
1000x33.8x20.7
2000x33.8x20.7
3000x33.8x20.7

PRODUCT NAME
Track/轨道
Track/轨道
Track/轨道


ORDER CODE
TL-0210
TL-0220
TL-0230



109x35x19

Power feeder unit/电源输入端


TL-0235



78x34x19

Linear(connector)/电源接驳器


TL-0231



70x70x17

L-connector/L型电源接驳器


TL-0232



105x70x17

T-connector/T型电源接驳器


TL-0233



105x105x17

X-connector/X型电源接驳器


TL-0234



280x35x19

Linear flexible/电源接驳器

TL-0236




31x34x19

End caps/堵头 (套)

TL-0237

APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE
三线轨道




单相电 230V 16A Max. & 120V 20A Max.



SIZE(mm)	PRODUCT NAME	ORDER CODE
1000x34x17	Track/轨道	TL-0310
2000x34x17	Track/轨道	TL-0320
3000x34x17	Track/轨道	TL-0330
108.5x35x18	Power feeder unit/电源输入端	TL-0335
80x35x18	Linear(connector)/电源接驳器	TL-0331
182x35x18	Linear(connector)/电源接驳器	TL-0331L
108.5x108.5x18	L-connector/L型电源接驳器	TL-0332
182x108.5x18	T-connector/T型电源接驳器	TL-0333
182x182x18	X-connector/X型电源接驳器	TL-0334
260x35x18	Linear flexible/电源接驳器	TL-0336
16.5x35x18	End caps/堵头 (套)	TL-0337


APPLY TO / 适用于




3 CIRCUITS/1 CIRCUITS DALI
TRACK SURFACE
四线三回路/四线DALI轨道




单相电 230V 16A Max.



三相电 230V 3*16A Max.



单相电 230V 16A Max.+DALI信号接线



SIZE(mm)

1000x35.2x35.5
2000x35.2x35.5
3000x35.2x35.5




PRODUCT NAME

Track rail/轨道
Track rail/轨道
Track rail/轨道

ORDER CODE

PRO-0410
PRO-0420
PRO-0430


98x35x35



Power feeder unit/电源信号输入端

PRO-0431L/R


166x35x35



Linear(connector)/电源信号接驳器

PRO-0434


100x100x35



L-connector/L型电源信号接驳器

PRO-0435L/R


166x100x35



T-connector/T型电源信号接驳器

PRO-0436L1/R1/L2/R2


166x166x35



X-connector/X型电源信号接驳器

PRO-0437


68x21x35



Conductive connector/导电接驳器

PRO-0433


68x31x35



Insulated connector/绝缘接驳器

PRO-0433A

248x35x35



Linear flexible/电源信号接驳器

PRO-0439


35x35.5x31



End caps/堵头

PRO-0432

APPLY TO / 适用于




3 CIRCUITS DALI TRACK SURFACE
六线三回路轨道




220V

单相电 230V 16A Max.



三相电 230V 3*16A Max.



SIZE(mm)


1000x35.2x35.5
2000x35.2x35.5
3000x35.2x35.5

PRODUCT NAME

Track rail/轨道
Track rail/轨道
Track rail/轨道

ORDER CODE


PRO-0610
PRO-0620
PRO-0630



139x35x35

Power feeder unit/电源信号输入端


PRO-0631L/R



107x21x35

Linear(connector)/电源信号接驳器


PRO-0633



203x35x35

Linear(connector)/电源信号接驳器


PRO-0634



119x119x35

L-connector/L型电源信号接驳器


PRO-0635L/R



203x119x35

T-connector/T型电源信号接驳器


PRO-0636L1/R1/L2/R2



203x203x35

X-connector/X型电源信号接驳器


PRO-0637



285x35x35

Linear flexible/电源信号接驳器

PRO-0639



264x35x35

Linear flexible/电源信号接驳器

PRO-0635



35x35.5x31

End caps/堵头

PRO-0432