

## Pablo

### TECHNICAL DATA / 数据

#### MOUNTING / 安装

Mounting location / 安装位置: Track Mounted / 轨道安装  
Type / 类型: Track Mounted / 轨道式

#### ELECTRICAL / 电器参数

Voltage / 电压: 220V  
Frequency / 频率: 50/60Hz  
Dimming / 调光: Depending on driver / 取决于驱动

#### DIMENSION / 相关尺寸

Dimension / 尺寸: Ø83\*218mm  
Height / 高度: max292mm  
Cut out / 开孔: NO  
Min.recessed depth / 最小天花高度: NO

#### LIGHT / 灯具

Adjustability / 可调角: 355° Rotation | 90° Tilting / 355旋转 | 90° 倾斜  
Light distribution / 照明方式: Direct / 直接  
Unified glare rating (UGR) / 防眩指数: <22  
Track / 轨道: 1 Circuits / 1 Circuits DALI / 3 Circuits / 3 Circuits DALI

#### LAMP DESCRIPTION / 光源参数

Lamp type / 光源类型: COB  
Colour rendering index (CRI) / 显色指数: Ra>90  
MacAdam / 色容差: <3

#### NOMINAL FLUX / 光通量

2700K: 25W 2247lm  
3000K: 25W 2401lm  
4000K: 25W 2401lm

#### OTHERS / 其他

LED life Time / 光源寿命: > 50,000h - L80 - B10 (Ta 25°C)  
Environment temperature / 温度环境: -20°C - 40°C  
Ingress protection / 防护等级: IP20

### PRODUCT DESCRIPTION / 产品描述

Zoomable track light, zooming angle range 15-36°  
可调焦轨道式灯具，能通过调焦来确定光束，调焦范围15-36°。

### PROJECT / 项目

### TYPE / 类型

### NOTES / 笔记


### QUANTITY / 数量

### DATE / 日期

### PHOTO / 图片



### DIMENSIONS / 尺寸

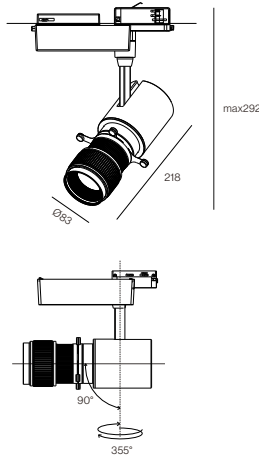

### PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱: 6PCS/CTN  
NW / 净重: 17KG/CTN  
GW / 毛重: 19KG/CTN  
Inner box size / 内盒尺寸: 30×24.5×13CM  
Outer box size / 外箱尺寸: 50×32×42CM




### ORDER TEMPLATE / 订单模板

| Type<br>类别 | Series<br>系列 | Power<br>功率 | Code<br>识别码 | CCT<br>色温 | CRI<br>显指 | Beam angle<br>光束角 | Body Color<br>颜色 | Dimming<br>调光 | Code<br>识别码 | Reflector Color<br>防眩杯颜色 | Remark<br>备注 |
|------------|--------------|-------------|-------------|-----------|-----------|-------------------|------------------|---------------|-------------|--------------------------|--------------|
| 02 轨道式     | 096X01000    | 25 25W      | *           | 27 2700   | G 90      | 00 15-36°         | SW 砂白<br>SB 砂黑   | 0 Non-DIM     | *           | D 哑黑                     | -xx          |
|            |              |             |             | 30 3000   | H 97      |                   |                  | 1 TRIAC       |             |                          |              |
|            |              |             |             | 35 3500   | T 全光谱     |                   |                  | 2 0/1-10V     |             |                          |              |
|            |              |             |             | 40 4000   |           |                   |                  | 3 DALI        |             |                          |              |

Example/例如: 02.096X01000-25\*27G00SW0\*D(-XX)

## LIGHT DISTRIBUTION / 配光曲线

4000/25W



Beam Angle:36°

|   | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 2550 | 0.64  |      |
| 2 | 637  | 1.29  |      |
| 3 | 283  | 1.92  |      |
| 4 | 159  | 2.57  |      |
| 5 | 102  | 3.21  |      |

Luminous flux lumineux  
883lm (EXTREME CUT OFF)

## Light spot shape choice / 光点形状选择



ROUND



SQUARE



TRIANGLE



RECTANGLE




TRAPEZOID




SECTOR



RHOMBUS

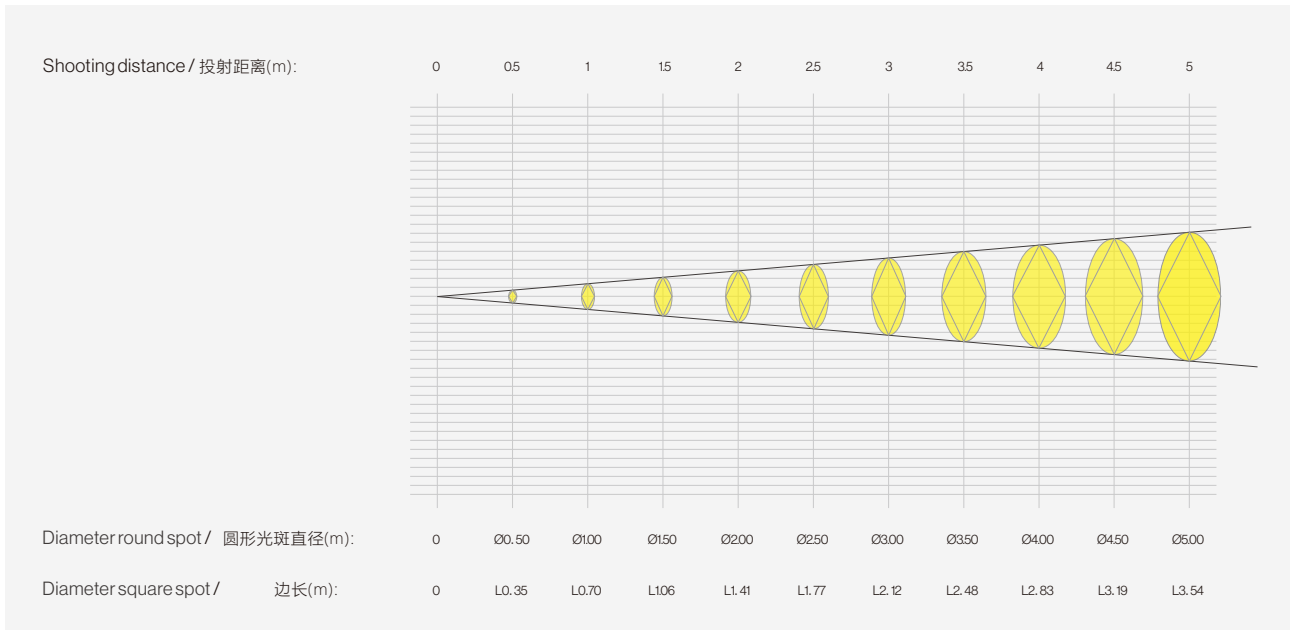

APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE  
两线轨道



220V

220V~250V 16A Max.



SIZE(mm)

1000

2000

3000

PRODUCT NAME

Track / 轨道

Track / 轨道


Track / 轨道

ORDER CODE

TL-0210

TL-0220


TL-0230



109x35x19

Power feeder unit/电源输入端


TL-0235



78x34x19

Linear(connector)/电源接驳器


TL-0231



70x70x17

L-connector/L型电源接驳器


TL-0232



105x70x17

T-connector/T型电源接驳器


TL-0233



105x105x17

X-connector/X型电源接驳器


TL-0234



280x35x19

Linear flexible/电源接驳器

TL-0236




31x34x19

End caps/堵头 (套)

TL-0237

APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE  
三线轨道



单相电 230V 16A Max. & 120V 20A Max.



SIZE(mm)

1000

PRODUCT NAME

Track / 轨道

ORDER CODE

TL-0310

2000


Track / 轨道

TL-0320

3000

Track / 轨道


TL-0330



108.5x35x18

Power feeder unit/电源输入端


TL-0335



80x35x18

Linear(connector)/电源接驳器


TL-0331



182x35x18

Linear(connector)/电源接驳器


TL-0331L



108.5x108.5x18

L-connector/L型电源接驳器


TL-0332



182x108.5x18

T-connector/T型电源接驳器


TL-0333



182x182x18

X-connector/X型电源接驳器

TL-0334



260x35x18

Linear flexible/电源接驳器

TL-0336




16.5x35x18

End caps/堵头 (套)

TL-0337

APPLY TO / 适用于




3 CIRCUITS/1 CIRCUITS DALI  
TRACK SURFACE  
四线三回路/四线DALI轨道




220V


单相电 230V 16A Max.



三相电 230V 3\*16A Max.



单相电 230V 16A Max.+DALI信号接线



SIZE(mm)

1000

2000

3000

PRODUCT NAME

Track / 轨道

Track / 轨道


Track / 轨道

ORDER CODE

PRO-0410

PRO-0420


PRO-0430



98x35x35

Power feeder unit/电源信号输入端


PRO-0431L/R



166x35x35

Linear(connector)/电源信号接驳器


PRO-0434



100x100x35

L-connector/L型电源信号接驳器


PRO-0435L/R



166x100x35

T-connector/T型电源信号接驳器


PRO-0436L1/R1/L2/R2



166x166x35

X-connector/X型电源信号接驳器


PRO-0437



68x21x35

Conductive connector/导电接驳器


PRO-0433



68x31x35

Insulated connector/绝缘接驳器


PRO-0433A



248x35x35

Linear flexible/电源信号接驳器

PRO-0439




35x35.5x31

End caps/堵头

PRO-0432


APPLY TO / 适用于




## 3 CIRCUITS DALI TRACK SURFACE 六线三回路轨道



单相电 230V 16A Max.



三相电 230V 3\*16A Max.



SIZE(mm)

1000

2000

3000

PRODUCT NAME

Track / 轨道

Track / 轨道


Track / 轨道

ORDER CODE

PRO-0610

PRO-0620

PRO-0630



139x35x35

Power feeder unit/电源信号输入端


PRO-0631L/R



107x21x35

Linear(connector)/电源信号接驳器


PRO-0633



203x35x35

Linear(connector)/电源信号接驳器


PRO-0634



119x119x35

L-connector/L型电源信号接驳器


PRO-0635L/R



203x119x35

T-connector/T型电源信号接驳器


PRO-0636L1/R1/L2/R2



203x203x35

X-connector/X型电源信号接驳器


PRO-0637



285x35x35

Linear flexible/电源信号接驳器

PRO-0639



264x35x35

Linear flexible/电源信号接驳器

PRO-0635



35x35.5x31

End caps/堵头

PRO-0432