

Ray

TECHNICAL DATA / 数据

MOUNTING / 安装

Mounting location / 安装位置:

Ceiling / 天花安装

Type / 类型:

Recessed / 嵌入式

ELECTRICAL / 电器参数

Voltage / 电压:

220V

Frequency / 频率:

50/60Hz

Dimming / 调光:

Depending on driver / 取决于驱动

DIMENSION / 相关尺寸

Dimension / 尺寸:

Ø85 mm

Height / 高度:

75 mm

Cut out / 开孔:

Ø75 mm

Min. recessed depth / 最小天花高度:

95 mm

LIGHT / 灯具

Adjustability / 可调角:

NO

Light distribution / 照明方式:

Direct / 直接

Unified glare rating (UGR) / 防眩指数:

<19

LAMP DESCRIPTION / 光源参数

Lamp type / 光源类型:

COB

Colour rendering index (CRI) / 显色指数:

Ra>90

MacAdam / 色容差:

<3

NOMINAL FLUX / 光通量

2700K: 8W 880lm / 10W 1100lm

3000K: 8W 920lm / 10W 1150lm

3500K: 8W 944lm / 10W 1180lm

4000K: 8W 976lm / 10W 1250lm

5000K: 8W 1000lm / 10W 1250lm

OTHERS / 其他

LED life Time / 光源寿命:

> 50,000h - L80 - B10 (Ta 25°C)

Environment temperature / 温度环境:

-20°C - 40°C

Ingress protection / 防护等级:

IP20

PRODUCT DESCRIPTION / 产品描述

A variety of beam angles are available to meet various space lighting needs and achieve diversified light output needs.

多种光束角提供选择，满足各种空间照明需求，实现多样化出光需求。

PROJECT / 项目

TYPE / 类型

NOTES / 笔记


QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸



PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱:

50PCS/CTN

NW / 净重:

12.5KG/CTN

GW / 毛重:

14.5KG/CTN

Inner box size / 内盒尺寸:

11×11×9.5 CM

Outer box size / 外箱尺寸:

57×23×49 CM




ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam Angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注
01 嵌入式	177A01000	08 8W 10 10W	*	27 2700	G 90	18 18°	SW 砂白	0 Non-DIM	*	W 砂白	-xx
				30 3000	H 97	26 26°	SB 砂黑	1 TRIAC		B 砂黑	
				35 3500		37 37°		2 0/1-10V		C 亮银	
				40 4000		50 50°		3 DALI		F 枪黑	
				50 5000				5 BLE		G 金	
								6 ZIGBEE		S 哑银	
										M 玫瑰金	


Example/例如: 01177A01000-08*27G18SW0*W(-XX)

LIGHT DISTRIBUTION / 配光曲线


3000K/8W

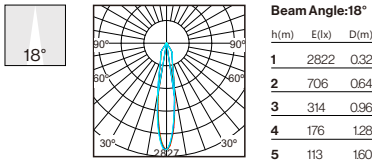


Luminous flux luminaire
673lm (EXTREME CUT OFF)

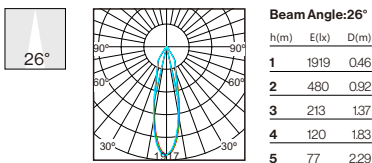

Luminous flux luminaire
663lm (EXTREME CUT OFF)

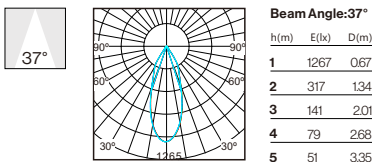


Luminous flux luminaire
642lm (EXTREME CUT OFF)

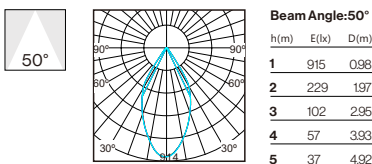


Luminous flux luminaire
649lm (EXTREME CUT OFF)


3000K/10W

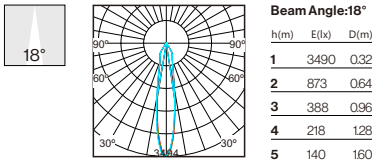


Luminous flux luminaire
830lm (EXTREME CUT OFF)

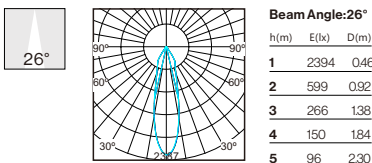

Luminous flux luminaire
832lm (EXTREME CUT OFF)

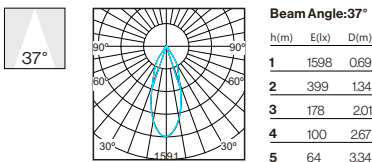

Luminous flux luminaire
809lm (EXTREME CUT OFF)

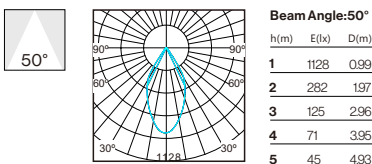

Luminous flux luminaire
802lm (EXTREME CUT OFF)