

Apollo

TECHNICAL DATA / 数据

MOUNTING / 安装

Mounting location / 安装位置: Ceiling / 天花安装
Type / 类型: Recessed / 嵌入式

ELECTRICAL / 电器参数

Voltage / 电压: 220V
Frequency / 频率: 50/60Hz
Dimming / 调光: Depending on driver / 取决于驱动

DIMENSION / 相关尺寸

Dimension / 尺寸: Ø61mm
Height / 高度: 80 mm
Cut out / 开孔: Ø55 mm
Min. recessed depth / 最小天花高度: 100 mm

LIGHT / 灯具

Adjustability / 可调角: 355° Rotation | 25° Tilting / 355° 旋转 | 25° 倾斜
Light distribution / 照明方式: Direct / 直接
Unified glare rating (UGR) / 防眩指数: <16

LAMP DESCRIPTION / 光源参数

Lamp type / 光源类型: COB
Colour rendering index (CRI) / 显色指数: Ra>90
MacAdam / 色容差: <3

NOMINAL FLUX / 光通量

2700K: 6W 588lm / 8W 784lm
3000K: 6W 630lm / 8W 840lm
3500K: 6W 642lm / 8W 856lm
4000K: 6W 660lm / 8W 880lm

OTHERS / 其他

LED life Time / 光源寿命: > 50,000h - L80 - B10 (Ta 25°C)
Environment temperature / 温度环境: -20°C - 40°C
Ingress protection / 防护等级: IP44

PRODUCT DESCRIPTION / 产品描述

Apollo has the mechanical characteristics of 25 ° vertical and 355 ° horizontal adjustable angle, which makes the beam focus more freely and accurately in space. Apollo series is flexible, providing a new lighting solution for indoor space. All parts can be reassembled into a perfect lamp structure.

Apollo拥有垂直25°和水平355°可调角度的机械特性，让光束在空间中聚焦更自由、更准确。Apollo系列灵活多变，为室内空间提供全新的照明解决方案，所有的部件都可以重新组合成完美的灯具结构。

PROJECT / 项目

TYPE / 类型

NOTES / 笔记


QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸

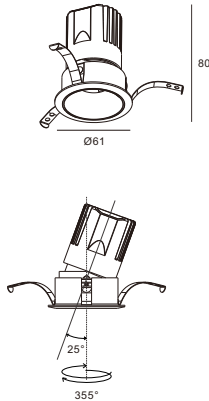

PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱: 50PCS/CTN
NW / 净重: 10KG/CTN
GW / 毛重: 12KG/CTN
Inner box size / 内盒尺寸: 11×11×9.5 CM
Outer box size / 外箱尺寸: 57×23×49 CM




ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注
01 嵌入式	208A01R00	06 6W	*	27 2700	G 90	20 20°	MW 哑白	0 Non-DIM	*	F 枪黑	-xx
		08 8W		30 3000	H 97	25 25°		1 TRIAC		C 亮银	
				35 3500		36 36°		2 0/1-10V		S 哑银	
				40 4000				3 DALI		A 哑白	
								5 BLE		D 哑黑	
								6 ZIGBEE			


Example/例如: 01.208A01R00-06*27G20MW0*F(-XX)

LIGHT DISTRIBUTION / 配光曲线


3000K / 8W

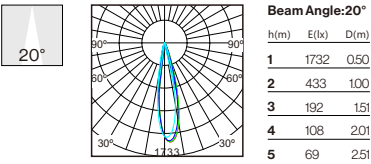

Luminous flux luminaire
459lm (EXTREME CUT OFF)

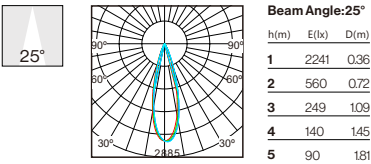

Luminous flux luminaire
394lm (EXTREME CUT OFF)

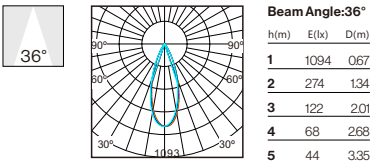

Luminous flux luminaire
472lm (EXTREME CUT OFF)

ACCESSORIES / 配件

All these accessories available /可选择多种配件

Oval Flood Lens / 拉伸镜片
60×0.3



Oval Flood Lens / 拉伸镜片
60×10



Oval Flood Lens / 拉伸镜片
60×15



Oval Flood Lens / 拉伸镜片
40×10



Flood Lens / 泛光镜片
18°/19°



Flood Lens / 泛光镜片
22°/23°



Flood Lens / 泛光镜片
27°/32°



Flood Lens / 泛光镜片
33°/45°



Honeycomb / 蜂窝网



Anti-glare reflector / 防眩杯
Gun black / 枪黑



Anti-glare reflector / 防眩杯
Chrome / 亮银



Anti-glare reflector / 防眩杯
Matt silver / 哑银



Anti-glare reflector / 防眩杯
Matt white / 哑白



Anti-glare reflector / 防眩杯
Matt black / 哑黑

