

TECHNICAL DATA / 数据

MOUNTING / 安装
Mounting location / 安装位置: Ceiling / 天花安装
Type / 类型: Recessed / 嵌入式

ELECTRICAL / 电器参数
Voltage / 电压: 220V
Frequency / 频率: 50/60Hz
Dimming / 调光: Depending on driver / 取决于驱动

DIMENSION / 相关尺寸
Dimension / 尺寸: Ø83 mm
Height / 高度: 97 mm
Cut out / 开孔: Ø75 mm
Min. recessed depth / 最小天花高度: 117 mm

LIGHT / 灯具
Adjustability / 可调角: 355° Rotation | 30° Tilting / 355° 旋转 | 30° 倾斜
Light distribution / 照明方式: Direct / 直接
Unified glare rating (UGR) / 防眩指数: <10

LAMP DESCRIPTION / 光源参数
Lamp type / 光源类型: COB
Colour rendering index (CRI) / 显色指数: Ra>90
MacAdam / 色容差: <3

NOMINAL FLUX / 光通量
2700K: 8W 819lm / 10W 1008lm / 12W 1188lm / 15W 1354lm
3000K: 8W 865lm / 10W 1064lm / 12W 1254lm / 15W 1429lm
3500K: 8W 904lm / 10W 1112lm / 12W 1310lm / 15W 1494lm
4000K: 8W 917lm / 10W 1128lm / 12W 1329lm / 15W 1515lm
5000K: 8W 923lm / 10W 1136lm / 12W 1338lm / 15W 1526lm

OTHERS / 其他
LED life Time / 光源寿命: > 50,000h - L80 - B10 (Ta 25°C)
Environment temperature / 温度环境: -20°C - 40°C
Ingress protection / 防护等级: IP20/IP65

PRODUCT DESCRIPTION / 产品描述

Innovative super comfortable light distribution technology combined with directional calculus optical design, with a shading angle up to 41° structure layout, to achieve UGR<10; A variety of beam angles of 18°, 28°, 38°, 50° are available to meet various space lighting needs. Providing convenient replacement of the honeycomb and a variety of light control accessories to achieve diversified light demand.

创新的超级舒适配光技术结合定向微积分光学设计，搭配遮光角高达41°的结构布局，获得眩光数值UGR < 10；拥有18°/28°/38°/50°多种光束角提供选择，满足各种空间照明需求；提供便捷更换的蜂窝网和多种控光配件实现多样化出光需求。

PROJECT / 项目

TYPE / 类型

NOTES / 笔记


QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸

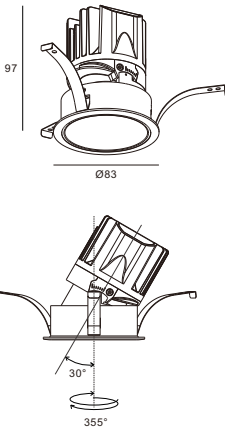

PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱: 24PCS/CTN
NW / 净重: 11KG/CTN
GW / 毛重: 14KG/CTN
Inner box size / 内盒尺寸: 18×15×12 CM
Outer box size / 外箱尺寸: 47×37×50 CM




ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注	
01 嵌入式	208A02R00	08 8W	*	27 2700	G 90	18 18°	MW 哑白	0 Non-DIM	*	F 枪黑	-xx	
		10 10W		30 3000	H 97	28 28°	MB 哑黑	1 TRIAC		C 亮银		
		12 12W		35 3500		38 38°		2 0/1-10V		J 哑银		
		15 15W		40 4000		50 50°		3 DALI		A 哑白		
				50 5000				5 BLE		D 哑黑		
												6 ZIGBEE


Example/例如: 01.208A02R00-08*27G18MW0*F(-XX)

LIGHT DISTRIBUTION / 配光曲线


3000K / 8W

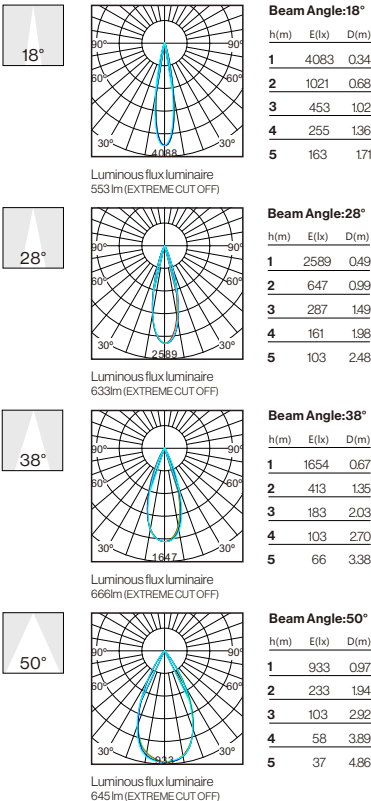


3000K / 10W

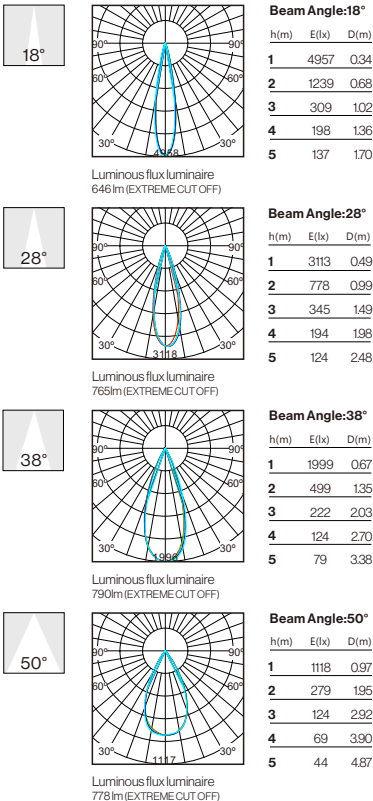

3000K / 12W

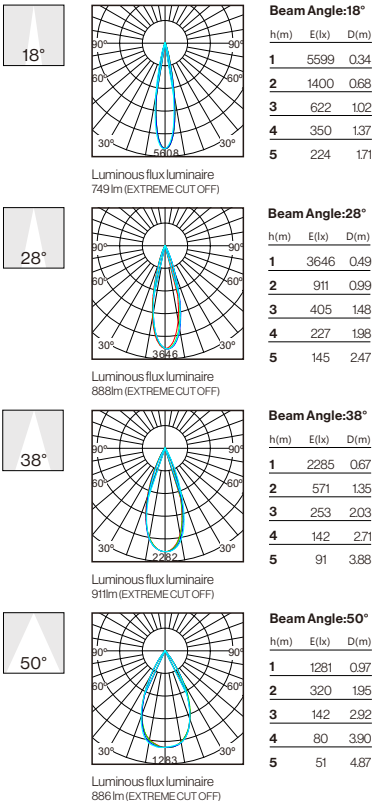

3000K / 15W

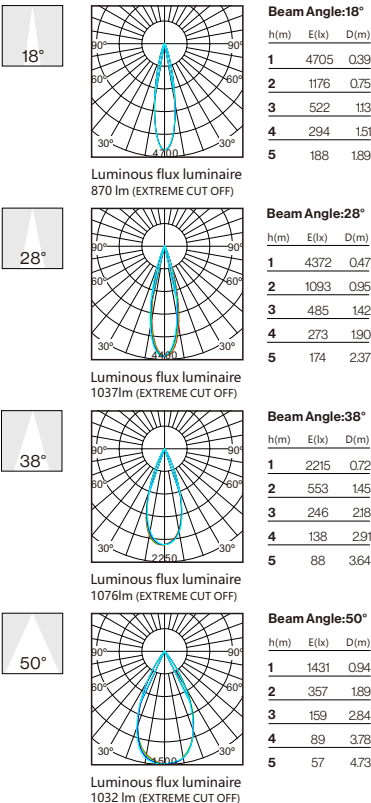

ACCESSORIES / 配件

All these accessories available /可选择多种配件

Oval Flood Lens / 拉伸镜片
60×0.3 1.13.00001



Oval Flood Lens / 拉伸镜片
60×15 1.13.00003



Flood Lens / 泛光镜片
18°/19° 1.13.00005




Flood Lens / 泛光镜片
27°/32° 1.13.00007



Honeycomb / 蜂窝网 1.13.00009



Oval hole / 椭圆筒
Matt black / 哑黑 1.13.00011



Anti-glare reflector / 防眩杯
Gun black / 枪黑 1.13.00013



Anti-glare reflector / 防眩杯
Matt silver / 哑银 1.13.00015



Anti-glare reflector / 防眩杯
Matt black / 哑黑 1.13.00017



Oval Flood Lens / 拉伸镜片
60×10 1.13.00002



Oval Flood Lens / 拉伸镜片
40×10 1.13.00004



Flood Lens / 泛光镜片
22°/23° 1.13.00006



Flood Lens / 泛光镜片
33°/45° 1.13.00008



Round hole / 圆孔
Matt black / 哑黑 1.13.00010



Bounding light cylinder / 束光筒
Matt black / 哑黑 1.13.00012



Anti-glare reflector / 防眩杯
Chrome / 亮银 1.13.00014



Anti-glare reflector / 防眩杯
Matt white / 哑白 1.13.00016

