

Matrix

TECHNICAL DATA / 数据

MOUNTING / 安装  
Mounting location / 安装位置: Track Mounted/轨道安装  
Type / 类型: Track Mounted/轨道式

ELECTRICAL / 电器参数  
Voltage / 电压: 220-240V  
Frequency / 频率: 50/60Hz  
Dimming / 调光: Depending on driver/取决于驱动

DIMENSION / 相关尺寸  
Dimension / 尺寸: 421\*155\*30 mm  
Height / 高度: 93mm  
Cut out / 开孔: NO

LIGHT / 灯具  
Adjustibility / 可调角: 355° Rotation|320° Tilting/355°旋转 | 320° 倾斜  
Light distribution / 照明方式: Direct 直接  
Track/轨道: 3 Circuits

LAMP DESCRIPTION / 光源参数  
Lamp type / 光源类型: SMD  
Colour rendering index (CRI) / 显色指数: Ra>90  
MacAdam / 色容差: <3

NOMINAL FLUX / 光通量  
2700K:15W 679lm  
6000K:15W 829lm

OTHERS / 其他  
LED life Time / 光源寿命: > 50,000h - L80 - B10 (Ta 25°C)  
Environment temperature / 温度环境: -20°C-40°C  
Ingress protection / 防护等级: IP20

PRODUCT DESCRIPTION / 产品描述

The matrix is suitable for general lighting with a wide beam and rotationally symmetrical light distribution, and is suitable for modern work with multifunctional lights. Efficient and compliant office lighting is based on flexible tracks. The lamp with a flat shell has an elegant appearance and focuses on the light. Flat lighting fixtures are particularly advantageous for low room heights.

矩阵适用于一般照明的宽光束、旋转对称光分布, 适合现代工作的多功能灯高效且符合标准的办公场所照明——以轨道作为灵活的基础。具有扁平外壳的灯具外观优雅, 并将焦点集中在光线上。平面灯具对于低房间高度特别有利。

ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam Angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注
02 轨道式	02:119A50000	15 15W	*	27 2700	G 90	23 23°	SW 砂白	0 Non-DIM	*	W 砂白	-xx
				30 3000		58 58°	SB 砂黑	1 TRIAC			
				35 3500		72 72°		2 0/-10V			
				40 4000		55°75 55°75°		3 DALI			
				27 2700							
				60 6000							

Example/例如: 02:119A50000-15\*27G23SW0\*W(-XX)

PROJECT / 项目

TYPE / 类型

NOTES / 笔记



QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸




PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱: 10PCS/CTN  
NW / 净重: 17.1KG/CTN  
GW / 毛重: 19.1KG/CTN  
Inner box size / 内盒尺寸: 18\*12\*45.5 CM  
Outer box size / 外箱尺寸: 48\*38\*62 CM




LIGHT DISTRIBUTION / 配光曲线


2700K /15W

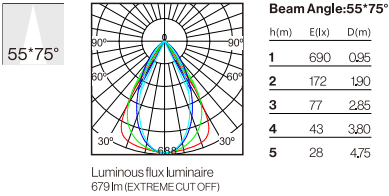

6000K /15W

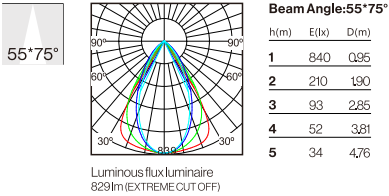

APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE  
两线轨道




220V~250V 16A Max.



SIZE(mm)
1000x33.8x20.7
2000x33.8x20.7
3000x33.8x20.7

PRODUCT NAME
Track rail/轨道
Track rail/轨道
Track rail/轨道


ORDER CODE
TL-0210
TL-0220
TL-0230



109x35x19
-----------

Power feeder unit/电源输入端
-------------------------


TL-0235
---------



78x34x19
----------

Linear(connector)/电源接驳器
-------------------------


TL-0231
---------



70x70x17
----------

L-connector/L型电源接驳器
---------------------


TL-0232
---------



105x70x17
-----------

T-connector/T型电源接驳器
---------------------


TL-0233
---------



105x105x17
------------

X-connector/X型电源接驳器
---------------------


TL-0234
---------



280x35x19
-----------

Linear flexible/电源接驳器
-----------------------

TL-0236
---------




31x34x19
----------

End caps/堵头 (套)
-----------------

TL-0237
---------

APPLY TO / 适用于



1 CIRCUITS TRACK SURFACE  
三线轨道



单相电 230V 16A Max. & 120V 20A Max.



SIZE(mm)

PRODUCT NAME

ORDER CODE



1000x34x17

Track rail/轨道

TL-0310



2000x34x17

Track rail/轨道


TL-0320



3000x34x17

Track rail/轨道


TL-0330



108.5x35x18

Power feeder unit/电源输入端


TL-0335



80x35x18

Linear(connector)/电源接驳器


TL-0331



182x35x18

Linear(connector)/电源接驳器


TL-0331L



108.5x108.5x18

L-connector/L型电源接驳器


TL-0332



182x108.5x18

T-connector/T型电源接驳器


TL-0333



182x182x18

X-connector/X型电源接驳器

TL-0334



260x35x18

Linear flexible/电源接驳器

TL-0336




16.5x35x18

End caps/堵头 (套)

TL-0337

APPLY TO / 适用于




3 CIRCUITS/1 CIRCUITS DALI  
TRACK SURFACE  
四线三回路/四线DALI轨道




220V


单相电 230V 16A Max.



三相电 230V 3\*16A Max.



单相电 230V 16A Max.+DALI信号接线



SIZE(mm)

1000x35.2x35.5

2000x35.2x35.5

3000x35.2x35.5

PRODUCT NAME

Track rail/轨道

Track rail/轨道


Track rail/轨道

ORDER CODE

PRO-0410

PRO-0420


PRO-0430



98x35x35

Power feeder unit/电源信号输入端


PRO-0431L/R



166x35x35

Linear(connector)/电源信号接驳器


PRO-0434



100x100x35

L-connector/L型电源信号接驳器


PRO-0435L/R



166x100x35

T-connector/T型电源信号接驳器


PRO-0436L1/R1/L2/R2



166x166x35

X-connector/X型电源信号接驳器


PRO-0437



68x21x35

Conductive connector/导电接驳器


PRO-0433



68x31x35

Insulated connector/绝缘接驳器

PRO-0433A



248x35x35

Linear flexible/电源信号接驳器

PRO-0439




35x35.5x31

End caps/堵头

PRO-0432

APPLY TO / 适用于




3 CIRCUITS DALI TRACK  
SURFACE  
六线三回路轨道




220V

单相电 230V 16A Max.



三相电 230V 3\*16A Max.



SIZE(mm)


1000x35.2x35.5  
2000x35.2x35.5  
3000x35.2x35.5

PRODUCT NAME

Track rail/轨道  
Track rail/轨道  
Track rail/轨道

ORDER CODE


PRO-0610  
PRO-0620  
PRO-0630



139x35x35

Power feeder unit/电源信号输入端


PRO-0631L/R



107x21x35

Linear(connector)/电源信号接驳器


PRO-0633



203x35x35

Linear(connector)/电源信号接驳器


PRO-0634



119x119x35

L-connector/L型电源信号接驳器


PRO-0635L/R



203x119x35

T-connector/T型电源信号接驳器


PRO-0636L1/R1/L2/R2



203x203x35

X-connector/X型电源信号接驳器


PRO-0637



285x35x35

Linear flexible/电源信号接驳器

PRO-0639



264x35x35

Linear flexible/电源信号接驳器

PRO-0635



35x35.5x31

End caps/堵头

PRO-0432