


01.170A01000

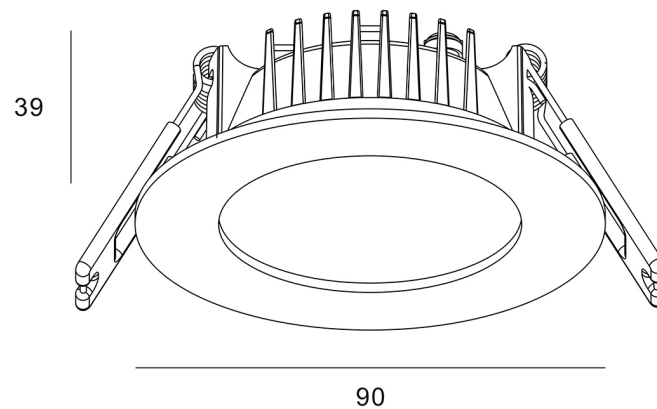

Light Output Ratio:	100.0%	
Luminaire Power:	5.476 W	
SHR Nominal:	1.25	Calculated using the TM5
SHR Maximum:	1.30	fine grid method.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: QINBOMIN
Test Date: 2021-06-03


γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 11.660m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 73.73 lm/W
MODEL	01.170A01000	I _{max} (cd)	188.8	S/MH (C0/180)	1.13	
NOMINAL POWER (W)	5	LOR (%)	100.0	S/MH (C90/270)	1.15	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	403.71	η UP, DN (C0-180)	0.0, 49.8	
NOMINAL FLUX (lm)	403.712	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.2	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	1.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

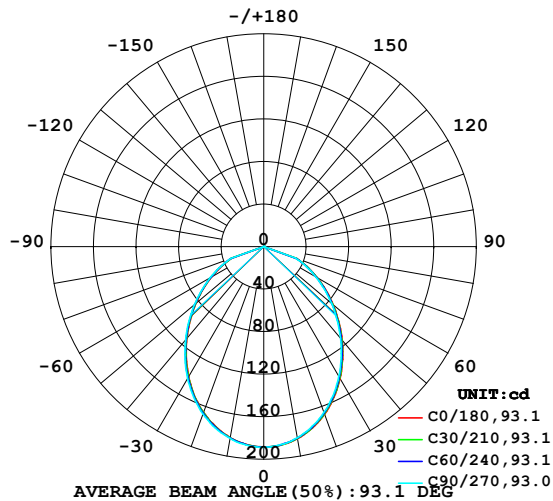

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

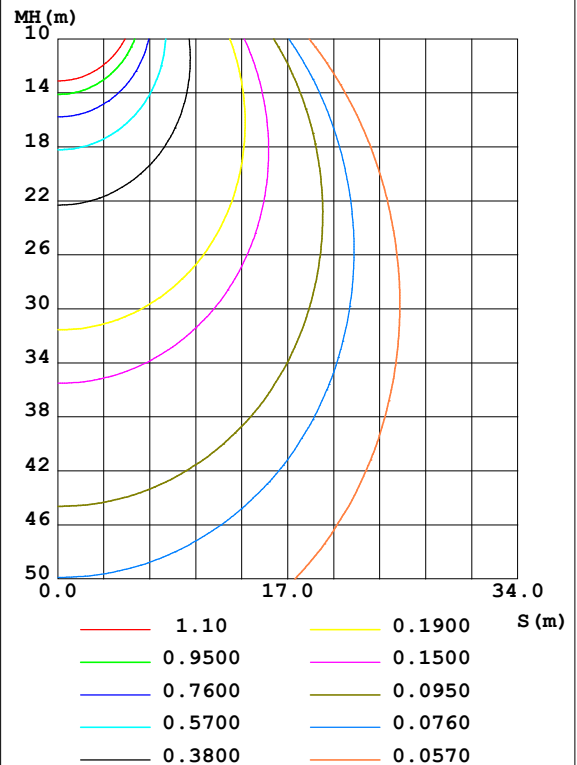

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: QINBOMIN
Test Date: 2021-06-03

γ Range: 0 - 70DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 11.660m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	183.4	182.9	182.5	182.1	182.4	182.3	183.1	183.5	0- 10	17.72	17.72	4.39,4.39
20	167.8	167.0	165.8	165.4	165.7	166.0	167.4	167.8	10- 20	49.51	67.23	16.7,16.7
30	143.6	142.7	141.3	140.8	141.1	141.8	143.2	143.9	20- 30	71.42	138.7	34.3,34.3
40	114.8	114.0	112.4	111.7	112.5	113.0	114.6	115.2	30- 40	80.13	218.8	54.2,54.2
50	85.44	84.72	83.27	82.70	83.26	83.92	85.23	85.84	40- 50	76.22	295.0	73.1,73.1
60	57.90	57.24	56.25	55.66	56.15	56.72	57.71	58.16	50- 60	62.94	357.9	88.7,88.7
70	33.23	32.83	32.22	31.68	31.97	32.59	33.26	33.75	60- 70	44.08	402.0	99.6,99.6
80	0	0	0	0	0	0	0	0	70- 80	1.690	403.7	100,100
90	0	0	0	0	0	0	0	0	80- 90	0	403.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QINBOMIN
 Test Date:2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.660m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

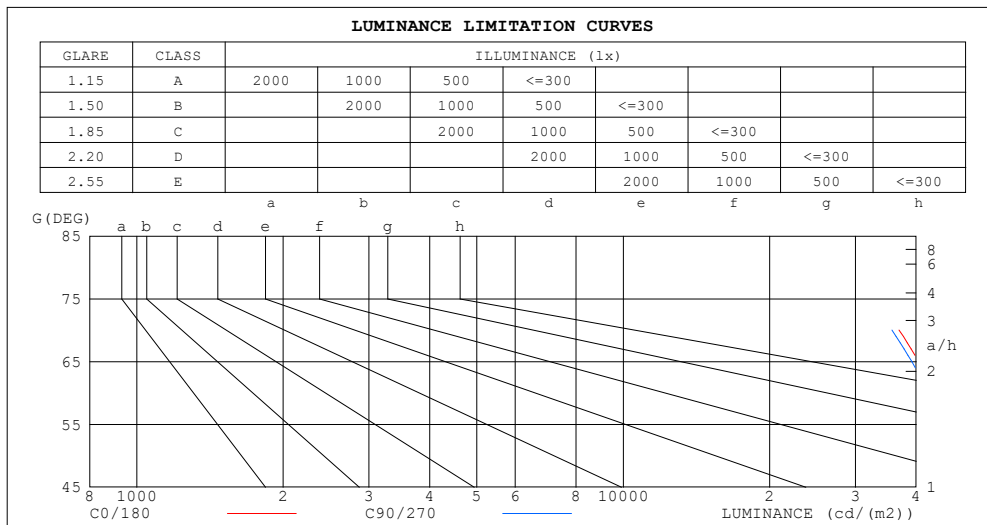

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	36900	35651
65	40560	39169
60	43981	42574
55	47291	45804
50	50478	49024
45	53702	52304

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QINBOMIN
Test Date:2021-06-03

γ Range: 0 - 70DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.660m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.95	.89	.85	.93	.88	.84	.90	.85	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.61	.72	.66	.61	.70	.64	.60	.68	.63	.59	.57
5.0	.68	.60	.54	.67	.59	.54	.65	.58	.53	.63	.57	.53	.61	.56	.52	.50
6.0	.62	.53	.48	.61	.53	.47	.59	.52	.47	.57	.51	.47	.56	.50	.46	.44
7.0	.56	.48	.42	.55	.48	.42	.54	.47	.42	.53	.46	.42	.51	.46	.41	.39
8.0	.52	.44	.38	.51	.43	.38	.50	.43	.38	.48	.42	.37	.47	.42	.37	.35
9.0	.47	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.42	.35	.31	.41	.35	.31	.29

LAMPS		LUMINAIRE BUDGETARY DIAGRAM															
50	CONDITIONS																
40	FLUX	212lm															
30	FACTOR	0.70															
	Hdown	0.00m															
	Hwork	0.80m															
20	Ework (AVE)	100lx															
	p (%)	cc	w	fc													
		70	50	30													
		50	30	20													
10																	
9																	
8																	
7																	
6																	
5																	
4																	
3																	
2																	
	10	20	30	40	50	70	100	200	300	500	700	1k	2k	3k	4k	5k	7k
	AREA (m2)																

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QINBOMIN
 Test Date:2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.660m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.249	.142	.045	.242	.138	.044	.229	.131	.042	.217	.125	.040	.206	.120	.039		
2.0	.246	.135	.041	.240	.132	.041	.229	.127	.040	.219	.123	.038	.209	.118	.037		
3.0	.236	.125	.038	.230	.123	.037	.220	.119	.036	.211	.116	.035	.203	.112	.035		
4.0	.223	.116	.034	.218	.114	.034	.209	.111	.033	.201	.108	.033	.193	.105	.032		
5.0	.209	.107	.031	.205	.105	.031	.197	.103	.030	.190	.100	.030	.183	.098	.029		
6.0	.197	.099	.028	.193	.097	.028	.186	.095	.028	.179	.093	.027	.173	.091	.027		
7.0	.185	.091	.026	.182	.090	.026	.175	.089	.026	.169	.087	.025	.164	.085	.025		
8.0	.174	.085	.024	.171	.084	.024	.165	.083	.024	.160	.081	.023	.155	.080	.023		
9.0	.164	.079	.022	.161	.079	.022	.156	.077	.022	.152	.076	.022	.147	.075	.022		
10.0	.155	.074	.021	.153	.074	.021	.148	.073	.020	.144	.071	.020	.140	.070	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
2.0	.166	.132	.104	.142	.114	.089	.098	.079	.062	.056	.046	.037	.018	.015	.012	
3.0	.158	.114	.079	.135	.098	.069	.093	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.150	.100	.062	.129	.087	.054	.089	.060	.038	.051	.035	.023	.017	.012	.007	
5.0	.143	.090	.050	.123	.078	.044	.085	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.136	.081	.042	.117	.070	.036	.081	.049	.026	.047	.029	.015	.015	.009	.005	
7.0	.130	.074	.035	.112	.064	.031	.077	.045	.022	.045	.027	.013	.015	.009	.004	
8.0	.124	.068	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.118	.063	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.008	.003	
10.0	.113	.059	.023	.098	.051	.020	.068	.036	.014	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QINBOMIN
 Test Date:2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.660m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm										
NAME: Mix					TYPE:Embedded Luminaire			WEIGHT:0.15kg		
SPEC.:					DIM.: ** (mm)			SERIAL No.:G032470		
MFR.: Guangdong KC Lighting CO.,LTD					SUR.:58mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.2	27.6	26.5	27.8	28.0	26.1	27.5	26.4	27.7	27.9
3H	27.5	28.8	27.8	29.0	29.2	27.3	28.6	27.6	28.8	29.1
4H	27.4	28.6	27.7	28.8	29.1	27.2	28.4	27.5	28.7	28.9
6H	27.3	28.4	27.6	28.7	28.9	27.1	28.3	27.5	28.5	28.8
8H	27.2	28.3	27.6	28.6	28.9	27.1	28.2	27.4	28.4	28.7
12H	27.2	28.2	27.5	28.5	28.8	27.0	28.1	27.4	28.4	28.6
4H 2H	26.8	28.0	27.1	28.2	28.5	26.7	27.9	27.0	28.1	28.4
3H	28.1	29.1	28.4	29.4	29.7	27.9	29.0	28.3	29.2	29.5
4H	28.0	28.9	28.3	29.2	29.5	27.8	28.8	28.2	29.1	29.4
6H	27.9	28.7	28.3	29.0	29.4	27.7	28.6	28.1	28.9	29.3
8H	27.8	28.6	28.2	28.9	29.3	27.7	28.5	28.1	28.8	29.2
12H	27.8	28.5	28.2	28.8	29.2	27.7	28.3	28.1	28.7	29.1
8H 4H	27.9	28.6	28.3	29.0	29.4	27.7	28.5	28.2	28.9	29.2
6H	27.8	28.4	28.2	28.8	29.2	27.7	28.3	28.1	28.7	29.1
8H	27.7	28.3	28.2	28.7	29.2	27.6	28.2	28.1	28.6	29.0
12H	27.7	28.2	28.2	28.6	29.1	27.6	28.0	28.1	28.5	29.0
12H 4H	27.8	28.5	28.2	28.9	29.3	27.7	28.4	28.1	28.8	29.2
6H	27.7	28.3	28.2	28.7	29.2	27.6	28.2	28.1	28.6	29.0
8H	27.7	28.2	28.2	28.6	29.1	27.6	28.0	28.1	28.5	29.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.5					+ 0.7 / - 0.4				
1.5H	+ 3.0 / - 1.4					+ 3.0 / - 1.4				
2.0H	+ 1.0 / - 1.5					+ 0.9 / - 1.4				

CIE Pub.117, 403.7 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -3.2$)
Area: 0.00264074 m²

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QINBOMIN
Test Date:2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.660m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	63	52	46	62	52	45	61	51	45	39
0.80	73	63	56	72	62	56	70	61	55	49
1.00	82	72	65	80	71	65	78	72	64	58
1.25	88	79	73	87	79	73	85	77	72	66
1.50	93	85	79	92	84	78	89	82	77	71
2.00	99	92	87	98	91	86	94	89	85	78
2.50	103	96	91	101	95	90	97	92	89	81
3.00	106	100	96	104	99	95	100	96	92	85
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	103	105	102	100	91
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QINBOMIN
 Test Date:2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.660m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

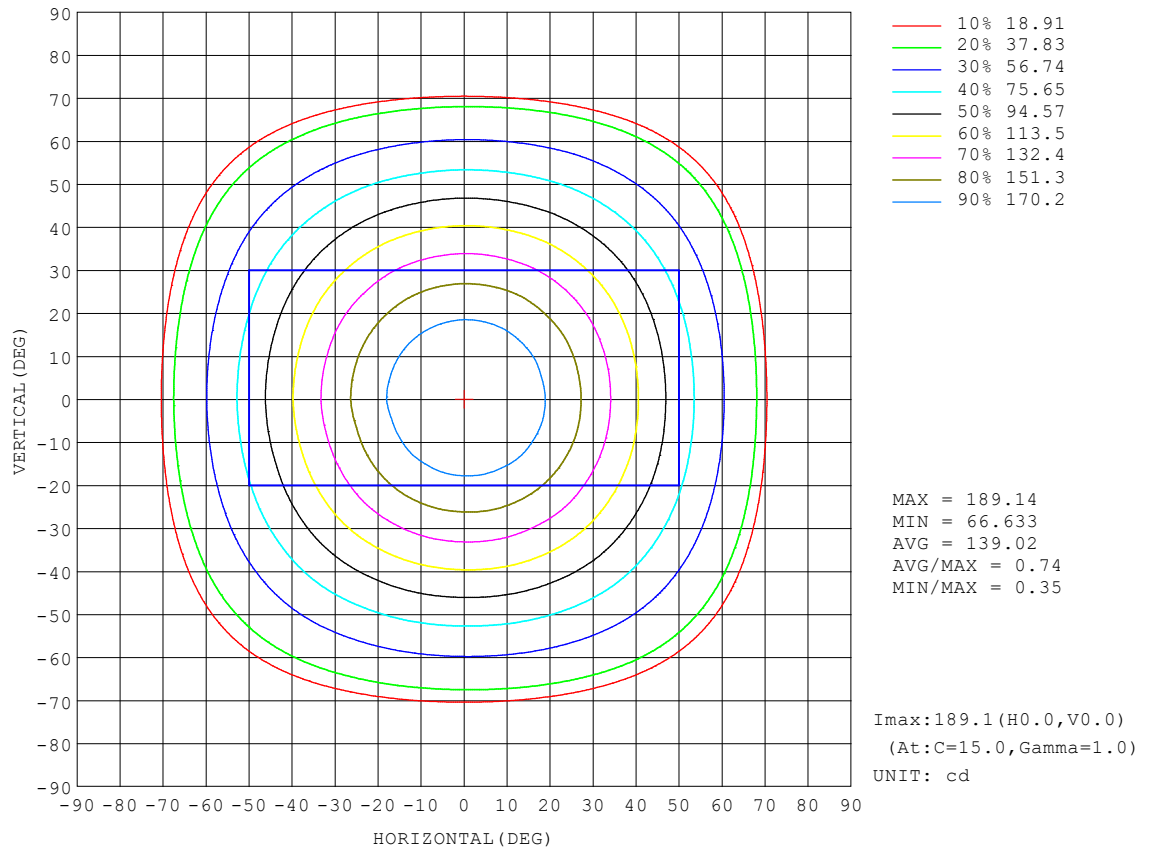


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QINBOMIN
Test Date:2021-06-03

γ Range: 0 - 70DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.660m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

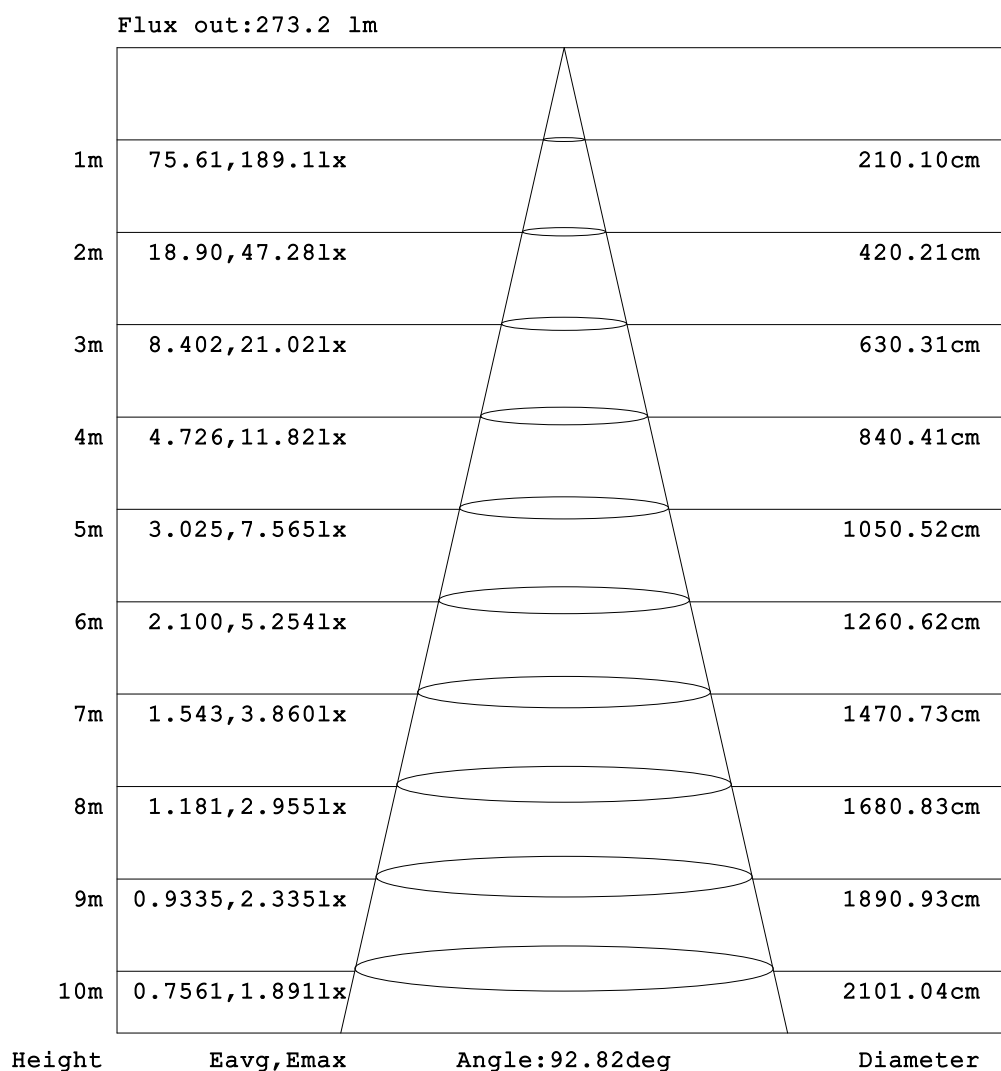


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: QINBOMIN
 Test Date: 2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 11.660m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

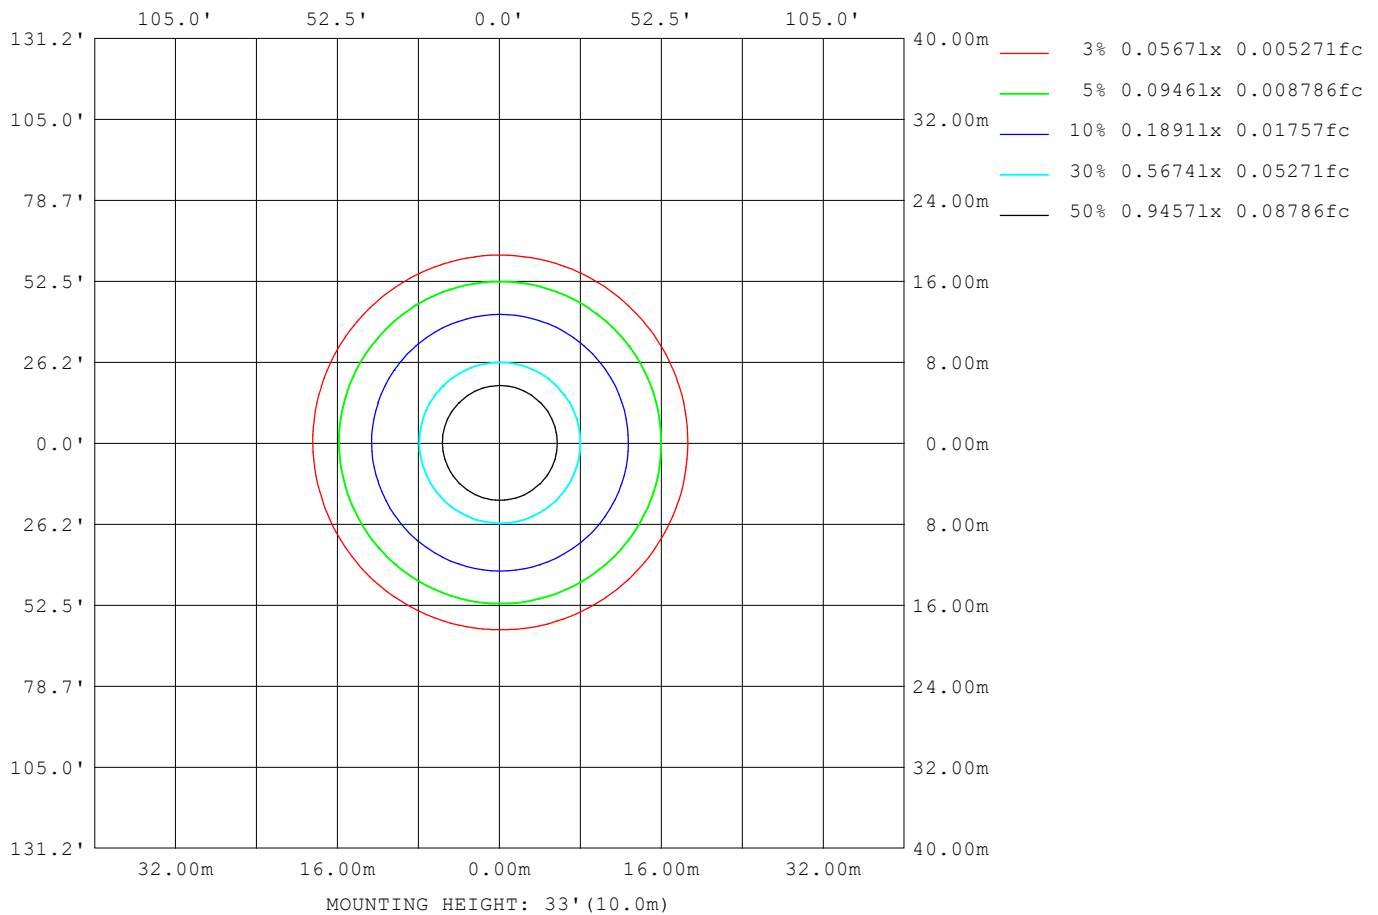

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QINBOMIN
 Test Date:2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.660m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	39799
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	39802
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	39789
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:QINBOMIN
 Test Date:2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
 Humidity:65.0%
 Test Distance:11.660m [K=1.0000]
 Remarks:

Planar Illuminance Curve

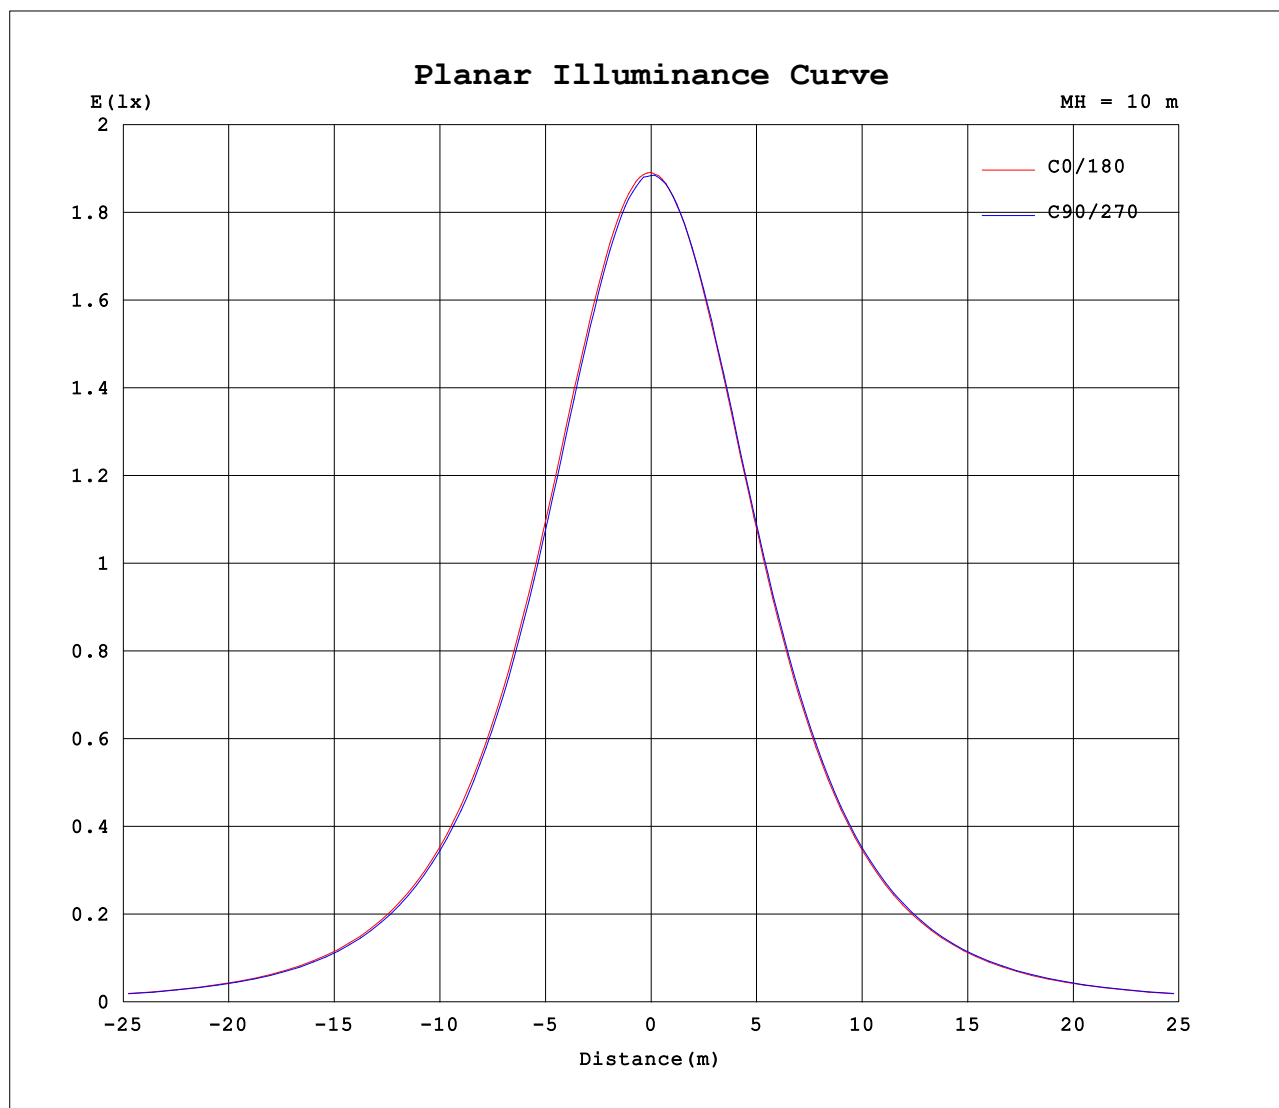

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: QINBOMIN
Test Date: 2021-06-03

γ Range: 0 - 70DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 11.660m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

Table--1

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QINBOMIN
Test Date:2021-06-03

```

γ Range: 0 - 70DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.660m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.28V I:0.0518A P:5.4758W PF:0.4800 Freq:50.99Hz Lamp Flux:403.712x1 lm		
NAME: Mix	TYPE:Embedded Luminaire	WEIGHT:0.15kg
SPEC.:	DIM.: ** (mm)	SERIAL No.:G032470
MFR.: Guangdong KC Lighting CO.,LTD	SUR.:58mm	Shielding Angle:

Table--2

UNIT: cd

[illegible]

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:QINBOMIN
Test Date:2021-06-03

```

γ Range: 0 - 70DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.417
Humidity:65.0%
Test Distance:11.660m [K=1.0000]
Remarks:

```