

Point

TECHNICAL DATA / 数据

MOUNTING / 安装	
Mounting location / 安装位置:	Ceiling / 天花安装
Type / 类型:	Recessed / 嵌入式
ELECTRICAL / 电器参数	
Voltage / 电压:	220V
Frequency / 频率:	50/60Hz
Dimming / 调光:	Depending on driver / 取决于驱动
DIMENSION / 相关尺寸	
Dimension / 尺寸:	Ø52 mm
Height / 高度:	45 mm
Cut out / 开孔:	Ø45 mm
Min. recessed depth / 最小天花高度:	65 mm
LIGHT / 灯具	
Adjustability / 可调角:	15° Tilting / 15° 倾斜
Light distribution / 照明方式:	Direct / 直接
Unified glare rating (UGR) / 防眩指数:	<10
LAMP DESCRIPTION / 光源参数	
Lamp type / 光源类型:	SMD
Colour rendering index (CRI) / 显色指数:	Ra>90
MacAdam / 色容差:	<3
NOMINAL FLUX / 光通量	
2700K:3W 327lm	
3000K:3W 339lm	
3500K:3W 348lm	
4000K:3W 360lm	
OTHERS / 其他	
LED life Time / 光源寿命:	> 50,000h - L80 - B10 (Ta 25°C)
Environment temperature / 温度环境:	-20°C-40°C
Ingress protection / 防护等级:	IP20

PRODUCT DESCRIPTION / 产品描述

Precise angle, perfect light control, Use high-quality high-finger chips Ra≥90, SDCM≤5.

精准角度，完美控光，采用高品质芯片Ra≥90, SDCM < 3。

PROJECT / 项目

TYPE / 类型

NOTES / 笔记


QUANTITY / 数量

DATE / 日期

PHOTO / 图片



DIMENSIONS / 尺寸

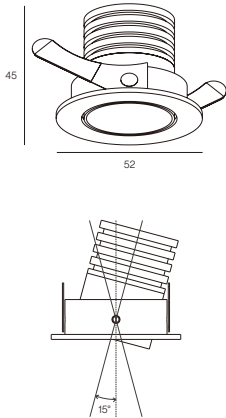

PACKAGE CONTENT / 包装

QTN/CTN / 数量/箱:	100PCS/CTN
NW / 净重:	6.5KG/CTN
GW / 毛重:	8.5KG/CTN
Inner box size / 内盒尺寸:	7×7×5.5 CM
Outer box size / 外箱尺寸:	37×37×25 CM



ORDER TEMPLATE / 订单模板

Type 类别	Series 系列	Power 功率	Code 识别码	CCT 色温	CRI 显指	Beam Angle 光束角	Body Color 颜色	Dimming 调光	Code 识别码	Reflector Color 防眩杯颜色	Remark 备注
01 嵌入式	001B01000	03 3W	*	27 2700	G 90	17 17°	SW 砂白	0 Non-DIM	*	W 砂白 B 砂黑	-xx
				30 3000	H 97	26 26°	SB 砂黑	1 TRIAC			
				35 3500				2 0/1-10V			
				40 4000				3 DALI			
								5 BLE			
								6 ZIGBEE			

Example/例如: 01.001B01000-03*27G17SW0*W(-XX)

LIGHT DISTRIBUTION / 配光曲线

3000K /3W

