

IT55

TECHNICAL DATA

MOUNTING

Mounting location	Magnetic
Type	Magnetic

ELECTRICAL

Voltage	48V
Frequency	--
Dimming	Depending on driver

DIMENSION

Dimension	Ø53. 5*125 mm
Height	192 mm
Cut out	NO
Min.recessed depth	NO

LIGHT

Adjustability	365° Rotation 90° Tilting
Light distribution	Direct
Unified glare rating(UGR)	<16

LAMP DESCRIPTION

Lamp type	COB
Colour rendering index (CRI)	Ra>90
MacAdam	<3

NOMINAL FLUX

2700K:15W 1470lm
3000K:15W 1575lm
3500K:15W 1605lm
4000K:15W 1650lm

OTHERS

LED life Time	> 50,000h - L80 - B10 (Ta 25°C)
Environment temperature	-20°C-40°C
Ingress protection	IP20

PRODUCT DESCRIPTION

Magnetic lighting system as a new generation of lighting solutions, through the track layout consistent with the decoration style, lamps in the form of modules, convenient disassembly, flexible movement and other features of free combination. It not only attention to both the key lighting and basic lighting functions. Thoroughly change before need to cut hole, wiring and other troublesome installation way, totally accord with the trend of current minimalism style popularity.

PROJECT

TYPE

NOTES



QUANTITY

DATE

PHOTO



DIMENSIONS



PACKAGE CONTENT

QTN/CTN	20PCS/CTN
NW	7.7KG/CTN
GW	9KG/CTN
Inner box size	25.2×19.5×7.5 CM
Outer box size	52×40×40 CM




DATA

Type	Model No.	Code No.	Power	CCT	CRI	Beam Angle	Body Color	Dimming	Reflector Color	Remark
Magnetic	IT3015	07.003B01000	15W	2700K 3000K 3500K 4000K 2700K-6000K	90	Zoomspot 15°-36° Zoomspot 30°-55°	Black White Bronze Chrome	Non-DIM 0/1-10V DALI BLE ZIGBEE	Black White Gold Bronze Chrome	-xx

LIGHT DISTRIBUTION


3000K/15W



Luminous flux luminaire
1292lm (EXTREME CUT OFF)

Beam Angle:15°


	h(m)	E(lx)	D(m)
1	13406	0.28	
2	3352	0.56	
3	1490	0.84	
4	838	1.13	
5	536	1.41	



Luminous flux luminaire
1148lm (EXTREME CUT OFF)

Beam Angle:30°


	h(m)	E(lx)	D(m)
1	3891	0.56	
2	973	1.12	
3	432	1.68	
4	243	2.24	
5	156	2.80	



Luminous flux luminaire
1254lm (EXTREME CUT OFF)

Beam Angle:36°

	h(m)	E(lx)	D(m)
1	3587	0.64	
2	897	1.27	
3	399	1.91	
4	224	2.54	
5	144	3.18	




Luminous flux luminaire
1036lm (EXTREME CUT OFF)

Beam Angle:55°

	h(m)	E(lx)	D(m)
1	1645	1.01	
2	411	2.03	
3	183	3.04	
4	103	4.06	
5	66	5.07	

APPLY TO



MINI TRACK M26A Suspended/surface

order installation track, light insets, mounting accessories separately

CASAMBI




inset single control via
Casambi app




Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

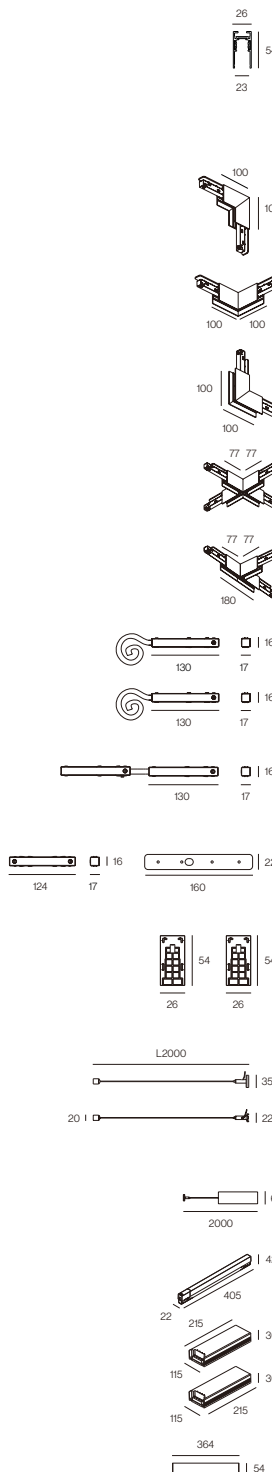

Model No.	Size(mm)	Product Name	Code No.
M26A10	1000	Track	07.M26A10000
M26A20	2000	Track	07.M26A20000
M26A30	3000	Track	07.M26A30000
M26AV0	100x100	Channel Corner*V90°	07.M26AV9000
M26AH0	100x100	Channel Corner*H90°	07.M26AH9000
M26AE0	100x100	Channel Corner*E90°	07.M26AE9000
M26AX0	77x77	X-Shaped Corner*X90°	07.M26AX9000
M26AT0	180x77x77	T-Shaped Corner*T90°	07.M26AT9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L05	54x26	End Caps	07.M26L05000
M26L07	2000x35x22.5	Pendant Kit	07.M26L06000
M26L08	2000x65	Pendant Kit	07.M26L07000
M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023
M26L10		Driver Box	07.M26L08000

APPLY TO



MINI TRACK M26T Trimless
order installation track, light insets, mounting accessories separately




CASAMBI



inset single control via
Casambi app

Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee



Model No.	Size(mm)	Product Name	Code No.
M26T10	1000	Track	07.M26T10000
M26T20	2000	Track	07.M26T20000
M2630	3000	Track	07.M26T30000



M26TV0	100x100	Channel Corner*V90°	07.M26TV9000
--------	---------	---------------------	--------------



M26TH0	100x100	Channel Corner*H90°	07.M26TH9000
--------	---------	---------------------	--------------




M26TE0	100x100	Channel Corner*E90°	07.M26TE9000
--------	---------	---------------------	--------------




M26TX0	77x77	X- Shaped Corner*X90°	07.M26TX9000
--------	-------	-----------------------	--------------



M26TT0	180x77x77	T- Shaped Corner*T90°	07.M26TT9000
--------	-----------	-----------------------	--------------




M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000




M26L03	130x17x16	Linear Flexible	07.M26L03000
--------	-----------	-----------------	--------------



M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
--------	------------------	------------------	--------------




M26L05	54x26	End Caps	07.M26L05000
--------	-------	----------	--------------



M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

APPLY TO



MINI TRACK M26R Trim
order installation track, light insets, mounting accessories separately




CASAMBI



inset single control via
Casambi app

Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee



Model No.	Size(mm)	Product Name	Code No.
M26R10	1000	Track	07.M26R10000
M26R20	2000	Track	07.M26R20000
M26R30	3000	Track	07.M26R30000



M26RV0	100x100	Channel Corner*V90°	07.M26RV9000
--------	---------	---------------------	--------------



M26RH0	100x100	Channel Corner*H90°	07.M26RH9000
--------	---------	---------------------	--------------




M26RE0	100x100	Channel Corner*E90°	07.M26RE9000
--------	---------	---------------------	--------------



M26RX0	77x77	X- Shaped Corner*X90°	07.M26RX9000
--------	-------	-----------------------	--------------




M26RT0	180x77x77	T-Shaped Corner*T90°	07.M26RT9000
--------	-----------	----------------------	--------------



M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
--------	-----------------------	-------------------	--------------




M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
--------	------------------------	-------------------	--------------




M26L03	130x17x16	Linear Flexible	07.M26L03000
--------	-----------	-----------------	--------------



M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
--------	------------------	------------------	--------------



M26L06	54x26	End Caps	07.M26L05R00
--------	-------	----------	--------------



M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

APPLY TO



MINI TRACK M26E Trimless
order installation track, light insets, mounting accessories separately







CASAMBI



inset single control via
Casambi app


Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee



Model No.	Size(mm)	Product Name	Code No.
M26E10	1000	Track	07.M26E10000
M26E20	2000	Track	07.M26E20000
M26E30	3000	Track	07.M26E30000
M26EV0	100x100	Channel Corner*V90°	07.M26EV9000
M26EH0	100x100	Channel Corner*H90°	07.M26EH9000
M26EE0	100x100	Channel Corner*E90°	07.M26EE9000
M26EX0	77x77	X- Shaped Corner*X90°	07.M26EX9000
M26ET0	180x77x77	T-Shaped Corner*T90°	07.M26ET9000
M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
M26L03	130x17x16	Linear Flexible	07.M26L03000
M26L04	124x17x16/160x22	Linear Connector	07.M26L04000
M26L05	54x26	End Caps	07.M26L05000
M26L09	405x22x42	Insert Power Supply	07.M26L10000
	215x115x30	Power Supply /LRS/350W/48V	2.01.MW022
	215x115x30	Power Supply /UHP/200W/48V	2.01.MW023

APPLY TO



MINI TRACK M26S Surface
order installation track, light insets, mounting accessories separately



CASAMBI



inset single control via
Casambi app

Options

1	Non-dim
2	Phase dim
3	0/1-10V
4	DALI
5	Bluetooth
6	ZigBee

	Model No.	Size(mm)	Product Name	Code No.
	M26S10	1000	Track	07.M26S10000
	M26S20	2000	Track	07.M26S20000
	M26S30	3000	Track	07.M26S30000
	M26SV0	50x50	Channel Corner*V90°	07.M26SV9000
	M26SH0	50x50	Channel Corner*H90°	07.M26SH9000
	M26SE0	50x50	Channel Corner*E90°	07.M26SE9000
	M26SX0	110x110	X- Shaped Corner*X90°	07.M26SX9000
	M26ST0	110x68x215	T-Shaped Corner*T90°	07.M26ST9000
	M26L01	130x17x16 Cable L:500	Power Feeder Unit	07.M26L01000
	M26L02	130x17x16 Cable L:2000	Power Feeder Unit	07.M26L02000
	M26L03	130x17x16	Linear Flexible	07.M26L03000
	M26L14	124x17x16/160x22	Linear Connector	07.M26L04S00
	M26L11	26.4x215	End Caps	07.M26L05S00
	M26L09	405x22x42	Insert Power Supply	07.M26L10000